

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 249 672 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
16.10.2002 Bulletin 2002/42

(51) Int Cl.7: **F25B 39/04, F25B 43/00,
F28F 9/02**

(21) Application number: **02251912.8**

(22) Date of filing: **18.03.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: **10.04.2001 JP 2001111202
22.05.2001 JP 2001152248
18.06.2001 JP 2001183033
26.09.2001 JP 2001293968**

(71) Applicant: **Sanden Corporation**
Isesaki-shi, Gunma 372-8502 (JP)

(72) Inventors:
• **Kado, Hirotaka**
Isesaki-shi, Gunma 372-8502 (JP)

- **Wada, Kenichi**
Ohta-shi, Gunma 373-8588 (JP)
- **Kamishima, Hiromitsu**
Ohta-shi, Gunma 373-8588 (JP)
- **Shinmura, Toshiharu**
Ohta-shi, Gunma 373-8588 (JP)
- **Watase, Daisuke**
Ohta-shi, Gunma 373-8588 (JP)
- **Oakada, Shigeru**
Ohta-shi, Gunma 373-8588 (JP)

(74) Representative: **Haley, Stephen**
Gill Jennings & Every,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)

(54) **Multi-flow type sub cool condenser**

(57) A multi-flow type sub cool condenser (1000) comprises a first header pipe (1), having at one end a plugging mechanism (100, 200, 300, 400) in which a plugging member can be fastened or unfastened at will manually and which enables a desiccant (13), having a length comparable to that of said first header pipe, to be

put in and taken out of said first header pipe. A second header pipe (2), the interior of which is sectioned into two chambers (2a, 2b) by a partition plate (8). A plurality of flat heat transfer tubes (4) interconnect said first and second header pipes, and a plurality of corrugated fins (5) are interposed between said flat tubes (4).

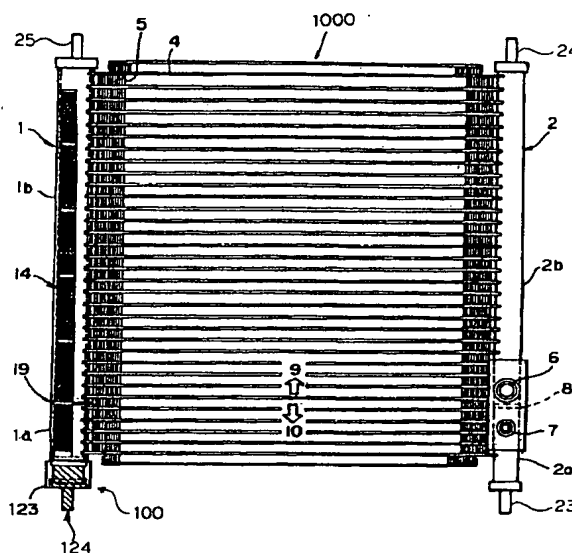


Fig. 1

Description

[0001] The present invention relates to a multi-flow type sub cool condenser used as a condenser in a vehicular air conditioning apparatus. More particularly, this invention relates to a multi-flow type sub cool condenser whose header pipe includes a desiccant.

[0002] A multi-flow type sub cool condenser is often used in a vehicular air conditioning apparatus. Specifically, the so-called sub cool condenser generally has a portion for heat exchange called the sub cool portion that cools further the liquefied refrigerant. Before flowing into the sub cool portion, the liquefied refrigerant must be accumulated somewhere. The vessel for accumulating the liquefied refrigerant before sub-cooling is called the liquid tank. In Japanese Patent Publication Hei 10-122705, Hei 9-170854 and Hei 9-170853, the liquid tank is disposed next to a header pipe of the condenser. This conventional structure is disadvantageous because use as the condenser and the liquid tank are separate from each other, their sizes are limited due to the constraint on the volume that a refrigeration circuit can occupy in a vehicle.

[0003] The refrigerant that has been liquefied in the condenser is then passed through a drier including desiccant for removal of water content. As disclosed in Japanese Patent Publication Hei 3-241273 and Hei 9-48232, the drier vessel itself conventionally is also provided as a separate vessel from the condenser. So this conventional structure is also disadvantageous with respect to the volume of space occupied in the vehicle.

[0004] A structure in which the desiccant of the drier is included in a liquid tank in order to save space is disclosed in Japanese Patent Publication Hei 9-538G7, Hei 8-219590 and Hei 9-33139. However, since the liquid tanks even in this structure oppress the area of the heat exchange core, this does not fully resolve the problem.

[0005] Further, as to the desiccant, it needs a relatively frequent repair or exchange because of its temporal change in quality or deterioration.

[0006] Thus, it has been long desired to make a multi-flow type sub cool condenser that can simultaneously both resolve the above problems and meet the above requirements and allows conducting easy maintenance of the desiccant.

[0007] The first object of the present invention is to provide a multi-flow type condenser that is equipped with a sub cool core. For that purpose, the multi-flow type sub cool condenser according to the present invention is designed to have a header pipe of which the lower portion functions as a liquid tank.

[0008] The second object of the present invention is to provide a multi-flow type condenser that includes a desiccant. For that purpose, the multi-flow type sub cool condenser according to the present invention is designed to have a header pipe containing a desiccant and functioning as a drier vessel too.

[0009] The third object of the present invention is to

provide a multi-flow type condenser that is equipped with a plugging mechanism at one end of the header pipe that allows easy repair of the desiccant. For that purpose, the multi-flow type sub cool condenser according to the present invention discloses four kinds of plugging mechanisms.

[0010] The first plugging mechanism comprises a bracket member that is fixed to the end of the header pipe and in which a female screw is provided, and plugging member around which a male screw is provided.

[0011] The second plugging mechanism comprises a block member which is fixed to the end of the header pipe and in which an internally bored groove is provided, and plugging member having protrusions that engage with the internally bored groove.

[0012] The third plugging mechanism comprises a block member that is fixed to the end of the header pipe and that has a couple of slits at diametrically opposing positions, a U-shaped stopper member that engages with the two slits and plugging member around which circumstance is provided a circular groove.

[0013] The fourth plugging mechanism comprises a flange member that is fixed to the end of the header pipe and that has a female screw member attached to its both sides, and plugging member that can be fixed to the flange member by screws.

[0014] Other objects, features, and advantages of this invention will be understood from the following description of preferred embodiments with reference to the drawings.

[0015] In the Drawings;

Fig. 1 is an elevational view of a multi-flow type sub cool condenser according to the first embodiment of the present invention.

Fig. 2 is a longitudinal cross sectional view of the left header pipe of Fig. 1. Fig. 3 is a magnified view showing a portion of the structure of the container of the desiccant near the partition plate of Fig. 2.

Fig. 4 is a magnified view showing a portion of another structure of the container of the desiccant near the partition plate of Fig. 2.

Fig. 5 is a perspective view of the container of the desiccant of Fig. 2.

Fig. 6 is a longitudinal cross sectional view of the left header pipe of Fig. 1 containing another example of the container of the desiccant.

Fig. 7 is an axial cross sectional view of Fig. 6.

Fig. 8 is a longitudinal cross sectional view of the left header pipe of Fig. 1 containing a yet another example of desiccant.

Fig. 9 is a perspective view of the desiccant of Fig. 8.

Fig. 10 is an elevational view of a multi-flow type sub cool condenser according to the second embodiment of the present invention.

Fig. 11 is a longitudinal cross sectional view of the left header pipe of Fig. 10.

Fig. 12 is a perspective view of the plugging mem-

ber used in the second embodiment of the present invention.

Fig. 13 is a longitudinal cross sectional view of the block member used in the second embodiment of the present invention.

Fig. 14 is a longitudinal cross sectional view of the plugging mechanism according to the second embodiment of the present invention.

Figs. 15(a)-15(c) are brief process charts of screwing on the plugging member according to the second embodiment of the present invention.

Fig. 16 is an elevational view of a variation of the plugging member.

Fig. 17 is a top plan view of the first header pipe according to a variation of the second embodiment of the present invention.

Fig. 18 is lateral view of Fig. 17.

Fig. 19 is a top plan view of the bracket member according to a variation of the second embodiment of the present invention.

Fig. 20 is a longitudinal cross sectional view of the bracket member of Fig. 19.

Fig. 21 is a lateral view of the plugging member according to a variation of the second embodiment of the present invention.

Fig. 22 is a bottom plan view of the plugging member of Fig. 21.

Figs. 23(a)-23(c) are brief process charts of screwing on the plugging member according to the variation of the second embodiment of the present invention. Fig. 24 is a top plan view of the first header pipe according to yet another variation of the second embodiment of the present invention.

Fig. 25 is a longitudinal cross sectional view of Fig. 24.

Fig. 26 is a top plan view of the plugging member according to the variation of the second embodiment of the present invention.

Fig. 27 is a lateral view of the plugging member of Fig. 26.

Fig. 28 is a longitudinal cross sectional view of the plugging mechanism according to the variation of the second embodiment of the present invention.

Fig. 29 is a lateral view of the plugging member according to yet another variation of the second embodiment of the present invention.

Fig. 30 is a top plan view of the plugging member of Fig. 29.

Fig. 31 is a lateral view of the block member according to the variation of the second embodiment of the present invention.

Fig. 32 is an elevational view of the block member of Fig. 31. Fig. 33 is a top plan view of the block member of Fig. 31.

Fig. 34 is a longitudinal cross sectional view of the plugging mechanism according to the variation of the second embodiment of the present invention.

Fig. 35(a)-35(c) are brief process charts of screwing

on the plugging member according to the variation of the second embodiment of the present invention.

Fig. 36 is an elevational view of a multi-flow type sub cool condenser according to the third embodiment of the present invention.

Fig. 37 is a longitudinal cross sectional view of the plugging mechanism of Fig. 36.

Fig. 38 is an axial cross sectional view including the stopper member of Fig. 37.

Fig. 39 is an assembling chart of the plugging mechanism of Fig. 36. Figs. 40(a)-40(b) are brief process charts of fixing the stopper member according to a variation of the third embodiment of the present invention.

Fig. 41(a)-41(b) are brief process charts of fixing the stopper member according to yet another variation of the third embodiment of the present invention.

Fig. 42 is a lateral view of the plugging mechanism according to yet another variation of the third embodiment of the present invention.

Fig. 43(a)-43(c) are brief process charts of fixing the stopper member according to the variation of the third embodiment of the present invention.

Fig. 44 is a longitudinal cross sectional view of the plugging mechanism according to yet another variation of the third embodiment of the present invention. Fig. 45 is an axial cross sectional view of Fig. 44 including the stopper member.

Fig. 46 is an elevational view of a multi-flow type sub cool condenser according to the fourth embodiment of the present invention.

Fig. 47 is a longitudinal cross sectional view of the left header pipe of Fig. 46.

Fig. 48 is a longitudinal cross sectional view of the upper portion of the left header pipe of Fig. 46.

Fig. 49 is a top plan view of the left header pipe of Fig. 46.

Fig. 50 is a longitudinal cross sectional view of the plugging mechanism according to a variation of the fourth embodiment of the present invention.

Fig. 51 is a longitudinal cross sectional view of the plugging mechanism according to a yet another variation of the fourth embodiment of the present invention.

Fig. 52 is a top plan view of the plugging mechanism according to the variation of the fourth embodiment of the present invention.

[0016] In Fig. 1, a multi-flow type sub cool condenser according to the first embodiment of the present invention is shown. Hereafter, a multi-flow type sub cool condenser will be called simply a condenser, for simplicity. The condenser 1000 comprises mainly the first header pipe 1, the second header pipe 2, a plurality of flat heat transfer tubes 4 and a plurality of corrugate fins 5. The first header pipe 1 and the second header pipe 2 are interconnected via the plurality of heat transfer tubes 4. The plurality of heat transfer tubes 4 and the plurality of

corrugated fins 5 are stacked alternately. The first header pipe 1 is sectioned into upper pipe portion 1b and lower pipe portion 1a by a partition plate 19. The second header pipe 2 is sectioned into upper pipe portion 2b and lower pipe portion 2a by a partition plate 8. To the second header pipe 2, an inlet pipe 6 is connected above and near the partition plate 8. The refrigerant flows into the upper pipe portion 2b of the second header pipe 2 via the inlet pipe 6 from an external refrigeration circuit (not shown). To the second header pipe, an outlet pipe 7 is further connected below and near the partition plate 8. The refrigerant flows out from the lower pipe portion 2a of the second header pipe 2 via the outlet pipe 1 to the external refrigeration circuit (not shown). The upper portion of the condenser 1000 sectioned by the two partition plates 19 and 8 is called a refrigerant condensing core 9 in this specification. The lower portion of the condenser 1000 sectioned by the two partition plates 19 and 8 is called a sub cool core 10 in this specification. That is, the refrigerant condensing core 9 comprises the upper pipe portion 2b of the second pipe header 2 and the upper pipe portion 1b of the first header pipe 1 and the portion of the plurality of the heat transfer tubes 4 that interconnect them. The sub cool core 10 comprises the lower pipe portion 2a of the second pipe header 2 and the lower pipe portion 1a of the first header pipe 1 and the remaining portion of the plurality of the heat transfer tubes 4 that interconnect them.

[0017] The refrigerant condensing core 9 functions to condensate and liquefy the refrigerant. The refrigerant flows from the upper pipe portion 2b of the second header pipe 2 to the upper pipe portion 1b of the first header pipe 1 via the heat transfer tubes 4 that belong to the refrigerant condensing core 9. The refrigerant flowing into the upper pipe portion 1b of the first header pipe 1 is liquefied and accumulates in the lower pipe portion 1a of the first header pipe 1. The sub cool core 10 functions to further cool the liquefied refrigerant. That is, the liquefied refrigerant flows from the lower pipe portion 1a of the first header pipe 1 to the lower pipe portion 2a of the second header pipe 2 via the remaining heat transfer tubes 4 that belong to the sub cool core 10, thereby being further cooled.

[0018] To the upper end of the first header pipe 1 a bracket 25 is fixedly brazed to hermetically seal off the header pipe 1. To the upper and lower ends of the second header pipe 2, two brackets 23 and 24 are fixedly brazed to hermetically seal off the header pipe 2. To the lower end of the first header pipe 1 a plugging mechanism 100 according to the first embodiment of the present invention is provided. The plugging mechanism 100 that can be fastened and unfastened at will comprises a bracket member 123 that is fixedly brazed to the lower end of the first header pipe 1 and a plugging member 124 that is screwed into the bracket member 123.

[0019] With reference to Fig. 2, the partition plate 19 provided in the first header pipe 1 has a hole through

which a container 14 containing a desiccant passes. The material constituting the container 14 can pass a fluid freely through its surface. In the container 14 a desiccant 13 is contained. The desiccant 13 may be shaped as one solid bar integrally by an adhesive or by a heat process as long as it can pass the refrigerant through its interior. Or the desiccant may be granular material contained in a fibrous bag. The container 14 comprises a skeleton 15 having cylindrical lattice and mesh portion 16. Or the container 14 may comprise a cylinder having punched wall.

[0020] The refrigerant having passed through the heat transfer tubes 4 of the refrigerant condensing core 9 flows into the interior of the upper pipe portion 1b of the first header pipe 1 as indicated by arrow 12. The refrigerant flowing into the upper pipe portion 1b further flows through the interior of the container 14 and the desiccant 13. Then the water content in the refrigerant is removed. Actually, the refrigerant having passed through the heat transfer tubes 4 of the refrigerant condensing core 9 is in a heavy mist state. The refrigerant in the mist state accumulates in the lower pipe portion 1a and lower portion of the upper pipe portion 1b of the first header pipe 1. The surface of the accumulated liquid refrigerant is indicated by a numeral 17.

[0021] Specifically the interior of the lower pipe portion 1a of the first header pipe 1 is called as liquid refrigerant accumulating portion 11. in this specification.

[0022] The plugging member 124 comprises rod portion 124c, sealing portion 124b and male screw portion 124a. The rod portion 124c is used for fixing the condenser 1000 to a vehicular body by inserting it into a hole provided in a vehicular frame. Around the sealing portion 124b an O-ring 125 is fitted for hermetical sealing.

[0023] One end of the bracket member 123 is fixedly brazed on the lower end 1a1 of the first header pipe 1. On the interior wall of the bracket member 123 is provided a female screw. By screwing the plugging member 124 into the bracket member 123, the plugging mechanism 100 can fasten the plugging member 124. By screwing the plugging member 124 off the bracket member 123, the plugging mechanism 100 can unfasten the plugging member 124. In this way, the repair or the maintenance of the desiccant 13 can be done.

[0024] An upper surface of the male screw portion 124a of the plugging member 124 pushes an adaptor member 126 upwardly. An upper surface of the adaptor member 126 pushes the bottom skeleton 15a of the container 14 upwardly. Thus, the container 14 of the desiccant 13 as a whole is supported by the partition plate 19 and the adaptor member 126.

[0025] It is preferable to provide a gap 18 between the ends of the heat transfer tubes 4 that protrude into the interior of the first header pipe 1 and the surface of the container 14 of the desiccant 13.

[0026] With reference to Fig. 3, a detailed illustration of the supporting structure of the container 14 by the

partition plate 19 is depicted. To the container 14 a flange 21 is provided and it engages with the partition plate 19. A hole 20 limits the radial movement of the container 14, and the engagement of the flange 21 and the partition plate 19 limits the axial movement of the container 14.

[0027] With reference to Fig. 4, a detailed illustration of another supporting structure of the container 14 by the partition plate 19 is depicted. The container 14 comprises a thin diameter portion 14a and a thick diameter portion 14b. A shoulder portion between the thin diameter portion 14a and the thick diameter portion 14b engages with the partition plate 19. A hole 20 limits the radial movement of the container 14, and the engagement of the shoulder portion and the partition plate 19 limits the axial movement of the container 14.

[0028] In Fig. 5, a perspective view of the skeleton 15 of the container 14 is illustrated.

[0029] In Fig. 6, another way for providing a gap between the ends of the heat transfer tubes 4 that protrude into the interior of the first header pipe 1 and the surface of the container 14 of the desiccant 13, is illustrated. Fig. 7 is the axial cross sectional view of the Fig. 6. In Fig. 6 the cross sectional shape of the container 14 is circle. With reference to Fig. 7, the ends 4a of the heat transfer tubes 4 that protrude into the interior of the first header pipe 1 are cut along a similar curve to the axial cross sectional shape of the container 14. This cut line 4a provides the gap 18' so that the refrigerant coming from the heat tubes 4 can flow smoothly into the interior of the first header pipe 1 and the interior of the container 14.

[0030] In Fig. 8, the first header pipe 1 containing a desiccant 42 formed as one bar integrally by an adhesive is illustrated. In Fig. 9, the desiccant 42 is illustrated in a perspective view.

[0031] The cross section of the desiccant 42 integrally formed as one bar or the cross section of the container 14 of the desiccant may be circle, generally circle, oval, or half circle.

[0032] In Fig. 10, a condenser 1000 according to the second embodiment of the present invention is shown. To the same parts with the first embodiment, the same numerals are attached, and their explanations are omitted. A bracket 26 is fixedly brazed on the header pipe 1 like the other brackets 24 and 23.

[0033] On the upper end of the first header pipe 1, a plugging mechanism 200 according to the second embodiment of the present invention in which a plugging member can be fastened or unfastened at will is provided. The plugging mechanism 200 comprises a generally cylindrical block member 240 that is fixedly brazed to the upper end of the first header pipe 1 and a plugging member 243 that is screwed into the block member 240.

[0034] With reference to Fig. 11, the lower point of the container 14 is formed in a tapered form so as to make it easy to insert the container 14 through the hole 20 of the partition plate 19. The container 14 of the desiccant can be removed or inserted through a central hole 280

of the block member 240 that is fixed to an upper end 1b1 of the first header pipe 1. An adaptor member may be disposed to hold the upper end of the container 14 between the lower surface of the plugging member 243 and the upper end of the container 14. However, in practice, since the desiccant 13 itself and the container 14 are very light, the only engagement between the container 14 and the hole 20 of the partition plate 19 can support the container 14 and the desiccant 13 without using the extra adaptor member.

[0035] The structure of the plugging member 243 is as shown in Fig. 12. On the upper surface of the plugging member 243 a knob 247 may be provided so as to make it possible to screw manually the plugging member 243 into the block member 240 or to screw it off manually. At four places around the plugging member 243 rectangular projections 244 that protrude radially outwardly from the center are provided. In Fig. 13, a longitudinal cross sectional view of the block member 240 is shown. At about the center of the block member 240 a central hole 280 is bored. To the upper portion of the central hole 280 a tapered surface 291 is connected. And to the tapered surface 291 an internally bored groove 290 is connected. Finally to the internally bored groove 290 a opening 292 that is slightly wider than the diameter D of the plugging member 243 is connected. On a flange 241 of the opening 292 that projects inwardly, four rectangular notch 242 having such width as to accept the projections 244 of the plugging member 248 are provided. In the lower surface of the flange 241, recesses 248 that are concave toward the upper direction and are slightly wider than the projections 244 of the plugging member 243 are provided at places between the neighbouring two notches 242.

[0036] With reference to Fig. 14, a state in which the plugging member 243 has been screwed into the block member 240 is shown. By adjusting each projection 244 of the plugging member 243 to the corresponding notches 242 of the block member 240, the plugging member 243 can be manually inserted into the central hole 280 of the block member 240. 249 is an O-ring for hermetical sealing fitted on the plugging member 243. Because the axial motion of the projections 244 of the plugging member 243 is limited by the flange 241 of the block member 240, the plugging member 243 will not be released spontaneously.

[0037] In Figs. 15(a)-15(c), a brief process charts for screwing the plugging member 243 into the block member 240 are shown. With reference to Fig. 15(a), first, the projections 244 of the plugging member 243 are adjusted to the corresponding notches 242 of the block member 240, and the plugging member 243 is manually inserted in a axial direction into the central hole 280 of the block member 240. With reference to Fig. 15(b), then, the plugging member 243 is rotated by about 45 degrees so as to turn the projections 244 within the internally bored groove 290. With reference to Fig. 15(c), last, by pulling the plugging member 243 to the axially

outward direction, it is possible to make the projections 244 of the plugging member 243 engage with the internal recesses 248 on the flange 241 of the block member 240. By the engagement of the projections 244 and the recesses 248, both of axial movement and rotational movement of the plugging member 243 is limited.

[0038] By doing the processes shown in Fig. 15(a)-15 (c) in a reversed order, it is possible to remove easily the plugging member 243 from the block member 240. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0039] Though the plugging member 243 has projections which have rectangular cross section as shown in Fig. 12, the cross section of the projections may have other shape. An example is shown in Fig. 16. At four places around a plugging member 245 shown in Fig. 16, cylindrical shaped pins 246 are implanted. Of course the plugging member 245 together with the cylindrical pins 240 may be formed integrally.

[0040] In Figs. 17-23(c), a plugging mechanism 200 according to a variation of the second embodiment of the present invention in which a plugging member can be fastened or unfastened at will is shown. With reference to Figs. 17-18, from the edge of the upper end 1b1 of the first header pipe 1, a couple of rectangular cut out portions 250 are provided at diametrically opposing positions.

[0041] With reference to Figs. 19-20, a bracket member 251 has a short cylindrical shape. On the inner wall of the bracket member 251 an inwardly pointing flange 253 is provided. The flange 253 is divided into two portions by a pair of rectangular notches 252 provided at diametrically opposing positions.

[0042] With reference to Figs. 21-22, a plugging member 254 has a pair of projections 255 protruding diametrically outwardly.

[0043] With reference to Fig. 18 and Fig. 20, a plugging mechanism 200 according to a variation of the second embodiment of the present invention is assembled by fixing and brazing the bracket member 251 onto the upper end 1b1 of the first header pipe 1 after adjusting a side of the notch 252 of the bracket member 251 to a side of the cut out portion 250 of the upper end 1b1 of the first header pipe 1. Then, with reference to Fig. 23 (a), by adjusting the projections 255 of the plugging member 254 to the notches 252 of the bracket member 251, it is possible to insert in the axial direction the plugging member 254 into the bracket member 251. Fig. 23 (b) shows a state in which the plugging member 254 has been inserted into the bracket member 251.

[0044] The cut out portions 250 of the upper end 1b1 of the first header pipe 1, and the flange 253 of the bracket member 251 cooperatively define two grooves in which the projections 255 of the plugging member 254 can turn around by a certain angle. Thus, by rotating the plugging member 254 from a state of Fig. 23(b) to a state of Fig. 23(c), it is possible to bring the plugging member in a state in which the plugging member 254 can not be

pulled out in an axial direction.

[0045] By doing the processes shown in Fig. 23(a)-23 (c) in a reversed order, it is possible to remove easily the plugging member 254 from the bracket member 251. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0046] In Figs. 24-28, a plugging mechanism 200 according to a yet another variation of the second embodiment of the present invention in which a plugging member can be fastened or unfastened at will is shown. With reference to Figs. 24-25, in the upper end 1b1 of the first header pipe 1, an expanded portion 257 is provided. The lower portion of the expanded portion 257 is a circular shoulder portion 257b, and, upper portion of the expanded portion 257 is a inwardly pointing flange 257a. In the flange 257a, four rectangular notches 256 are provided.

[0047] With reference to Fig. 26-27, around the plugging member 258, four projections 259 protruding outwardly are provided at diametrically opposing positions.

[0048] With reference to Fig. 24 and Fig. 26, the plugging mechanism 200 enables the plugging member 258 to be inserted in a axial direction into the expanded portion 257 provided in the upper end 1b1 of the first header pipe 1 after adjusting the projections 259 of the plugging member 258 to the notches 256 of the flange 257a.

[0049] The expanded portion 257 of the upper end 1b1 of the first header pipe 1 forms by itself an internal circular groove in which the projections 259 of the plugging member 258 can orbit. Therefore, if after inserted into the flange 257a the plugging member 258 is rotated by a certain angle, then the plugging member 258 becomes in a state in which the plugging member 258 can not be released spontaneously because of the engagement of the projections 259 and the circular shoulder portion 257b and the flange 257a. This state is shown in Fig. 28.

[0050] By doing the processes in a reversed order, it is possible to remove easily the plugging member 258 from the expanded portion 257. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0051] In Figs. 29-35(c), a plugging mechanism 200 according to a yet another variation of the second embodiment of the present invention in which a plugging member can be fastened or unfastened at will is shown. With reference to Figs. 29-30, to a plugging member 264 two wide projections 265 projecting outwardly are provided at diametrically opposing positions. And for easy manual handling a knob 260 is provided on the plugging member 264. At a lower portion of the plugging member 264 is fitted an O-ring 249 for hermetical sealing.

[0052] With reference to Figs. 31-33, a block member 261 comprises a lower short cylindrical portion and an upper portion having hooking function. With reference to Fig. 32, in the upper portion of the block member 261, a pair of arms 263 that protrude toward the center are provided. At middle portion between the upper arm portion 263 and the short cylindrical portion of the block

member 261 is provided a plate portion 262. In the plate portion 262, a female screw 266 is provided.

[0053] With reference to Fig. 34, a plugging mechanism 200 according to this variation of the second embodiment of the present invention is assembled first by inserting the lower short cylindrical portion into the upper end 1b1 of the first header pipe 1 and fixing and brazing them. With reference to Fig. 35(a), then, by adjusting the angular position of the plugging member 264 relative to the arms 263 such that the projections 265 are not hindered by the arms 263, it is possible to insert the plugging member 264 into the block member 261.

[0054] Under the arms 263 themselves, grooves in which the projections 265 of the plugging member can orbit by a certain angle are formed. Therefore, by rotating the plugging member 264 from a state shown in Fig. 35(b) to a state shown in Fig. 35(c), it becomes into a state in which the axial movement of the plugging member 264 is limited by the arms 263.

[0055] By doing the processes shown in Fig. 35(a)-35(c) in a reversed order, it is possible to remove easily the plugging member 264 from the block member 261.

[0056] Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0057] If a bolt 267 is screwed into the female screw 266, then the plugging member 264 becomes more securely fixed as shown in Fig. 34.

[0058] In Fig. 36, a condenser 1000 according to the third embodiment of the present invention is shown. To the same parts with the first embodiment, the same numerals are attached, and their explanations are omitted.

[0059] On the lower end of the first header pipe 1, a plugging mechanism 300 according to the third embodiment of the present invention in which a plugging member can be fastened or unfastened at will is provided. The plugging mechanism 300 comprises a generally cylindrical block member 320 that is fixed and brazed to the lower end of the first header pipe 1 and a plugging member 325 that is inserted straightly into the block member 320 and a stopper member 327.

[0060] In Fig. 37, a longitudinal cross sectional view of the plugging mechanism 300 in which the plugging member is in a fixed state is shown. The block member 320 is inserted and brazed to the lower end 1a1 of the first header pipe 1. The center hole 280 partially accommodates the bottom 14b of the container 14 of the desiccant. On the upper portion of the plugging member 325 an O-ring 328 is fitted for hermetical sealing.

[0061] With reference to Fig. 39, the stopper member 327 is a U-shaped metal. The stopper member 327 has lateral side surfaces 327a and 327b. On the outer surface of the block member 320, a pair of slits 324 in which the arms of the stopper member 327 are inserted, are provided at diametrically opposing positions. The slits 324 is in communication with the center hole 280 via rectangular hole 324c. The slit 324 has side surfaces 324a and 324b that are perpendicular to the axis of the first header pipe 1.

[0062] With reference to Fig. 39, first, the plugging member 325 is inserted into the center hole 280 of the block member 320 until a surface 326b of a circular groove 326 provided on the plugging member 325 coincide with the side surface 324b of the slit 324 of the block member 320. Then, two arms of the stopper member 327 is inserted into the two slits 324 of the block member 320. On this occasion, the lateral side surface 327a and 327b of the stopper member 327 engage with the side surfaces 324a and 324b of the slits 324. Therefore the stopper member 327 is fixed relative to the block member 320.

[0063] With reference to Fig. 38 further, on this occasion, a surface 326a of the circular groove 326 of the plugging member 325 extends beyond a straight bottom surface 324c of the slit 324. Therefore, the plugging member 325, due to the engagements between the surfaces 326a, 326b of the circular groove 326 of the plugging member 325 and the lateral side surfaces 327a, 327b of the stopper member 327 respectively, is fixed to the stopper member 327. As a result, the plugging member 325 can be fixed relative to the block member 320.

[0064] If we pull out the stopper member 327, then the fix of the plugging member is released and the plugging member 325 can be easily pulled out from the block member 320. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0065] In Figs. 40(a)-41(b), a variation of the third embodiment of the present invention is shown. With reference to Figs. 40(a)-40(b), the stopper member 330 has longer arms. After inserting the arms of the stopper member 330 into the slits 324 of the block member 320, the points of the arms 332 of the stopper member 330 that protrude out of the block member 320 can be folded so as to embrace the block member 320. By this contrivance, the occurrence of a spontaneous release of the stopper member 380 can be prevented. Of course, it is possible to fold the points 332 of the arms back to its original shape, so the stopper member 330 can be easily fixed and easily detached.

[0066] With reference to Figs. 41(a)-41(b), one arm 334 of the stopper member 333 is designed to be longer than the other arm 336. After inserting the stopper member 333 into the slits 324, the point of the longer arm 334 of the stopper member 333 that protrudes out of the block member 320 may be bent by a right angle to embrace the block member 320. By bending the longer arm once, a folded portion 335 is formed, and by bending the point of the folded portion 335 further, the folded portion 337 is formed. The folded portion 337 is engaged with the tip of the shorter arm 336. By this contrivance, the occurrence of a spontaneous release of the stopper member 333 can be prevented. Of course, it is possible to fold the arm 334 back to its original shape, so the stopper member 333 can be easily fixed and easily detached.

[0067] In Figs. 42-43(b), another variation of the third

embodiment of the present invention is shown. With reference to Fig. 43(a), both the arms of the stopper member 338 are designed to be long. On each tip of the arms is provided a hole 343a for passing a bolt and female screw 343b respectively. In a terminal end of a side plate 16, a pair of ear portion 340 having holes 342 for passing the bolt are provided. After inserting the stopper member 338 into the slits 324 of the block member 320, the hole 343a and the female screw 343b of the stopper member 338 and the holes 342 are adjusted. Then, a bolt 341 is screwed into them. By this contrivance, the occurrence of a spontaneous release of the stopper member 338 can be prevented.

[0068] In Figs. 44-45, another variation of the third embodiment of the present invention is shown. Like before, the stopper member 346 is fixed to the block member 347 by the engagement of the stopper member 346 and the slits 348 of the block member 347. The lower surface 344b of the plugging member 344 is in engagement with one lateral side surface 346b of the stopper member 346. In a usual state of a refrigerant circuit, since the pressure in the first header pipe 1 is higher than the external atmosphere, this single sided engagement suffices.

[0069] In Fig. 46, a condenser 1000 according to the fourth embodiment of the present invention is shown. To the same parts with the first embodiment, the same numerals are attached, and their explanations are omitted.

[0070] On the upper end of the first header pipe 1, a plugging mechanism 400 according to the fourth embodiment of the present invention in which a plugging member can be fastened or unfastened at will is provided. The plugging mechanism 400 comprises a generally cylindrical flange member 426 that is fixed and brazed to the upper end of the first header pipe 1 and a plugging member 421 that is inserted straightly into the flange member 426 and fixed by bolts 431.

[0071] In Figs. 47-49, detailed state of the plugging mechanism 400 in which the plugging member 421 is fixed is shown. With reference to Fig. 48, to the center of the flange member 426 a short cylindrical portion 427 is provided. It is fixed and brazed to the upper end 1b1 of the first header pipe 1. On flanges 428 that are positioned at both sides of the short cylindrical portion 427, holes 429 for fixing female screw member 430 are provided. The female screw member 430 may be fixed to the hole 429 by pressure insertion or welding.

[0072] Lower portion of the plugging member 421 is inserted into the cylindrical portion 427 of the flange member 426. The lower portion of the plugging member 421 may be fitted an O-ring 484 for hermetical sealing. To the both side of the plugging member 421 are provided flanges 421b that overlap the flange 428 of the flange member 426. In the both flange 421b, holes 432 for passing bolt are bored. By screwing a couple of bolts 431 into the female screw member 430 of the flange member 426 via the holes 432 of the plugging member 421, the plugging member 421 can be fixed onto the

flange member 426. By screwing the bolts 431 off the female screw member 430, the plugging member 421 can be removed from the flange member 426. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0073] In Fig. 50, a variation of the fourth embodiment of the present invention is shown. With reference to Fig. 50, at the middle portion of the female screw member 430, an expanded portion 435 that functions to limit the insertion length of the female screw member 430 into the flange 428 is provided.

[0074] In Fig. 51-52, a yet another variation of the fourth embodiment of the present invention. In this variation, both of the flange member 440 and the plugging member 437 are asymmetrical. In the left side in Figs. 51-52, the flange member 440 has an overhanged flange 438 and a shoulder 436 that are made by folding twice the originally flat flange. And to the left side of the plugging member 437, a short flange 437a that can be inserted into between the flange 438 and the shoulder 436 is provided. The right side of the flange member 440, a portion 439 for providing a female screw 441 is made by folding twice and squashing the originally flat flange plate. To the right side of the plugging member 437 is provided a flange 437b having a hole for passing a bolt like before. By engaging the short flange 437a into the overhanged flange 438 and by screwing one bolt 431 into the female screw 441 via the flange 437b, the plugging member 437 can be fixed to the flange member 440. By screwing the bolt 431 off the female screw 441, the plugging member 437 can be detached from the flange member 440. Thus, it is possible to repair or exchange the desiccant in the first header pipe 1.

[0075] Thus, it is possible to put or to pull the desiccant in and out of the first header pipe by opening or closing the plugging mechanism in which a plugging member can be fastened and unfastened at will. And as has been clearly described already, since the condenser contains the desiccant in its one header pipe, it does not need an extra space for placing the separate receiver-drier vessel. Further the condenser does not suffer from a reduction in its heat exchange core area.

[0076] Although the present invention has been described in detail in connection with preferred embodiments, the invention is not limited thereto. It will be understood by those skilled in the art that variations and modifications may be made within the scope of this invention, as defined by the following claims.

Claims

1. A multi-flow type sub cool condenser (1000) comprising

a first header pipe (1), having at one end a plugging mechanism (100, 200, 300, 400) in which a plugging member can be fastened or unfastened

- tened at will manually and which enables a desiccant (13), having a length comparable to that of said first header pipe, to be put in and taken out of said first header pipe,
 a second header pipe (2), the interior of which is sectioned into two chambers (2a,2b) by a partition plate (8),
 a plurality of flat heat transfer tubes (4) interconnecting said first and second header pipes, and
 a plurality of corrugated fins (5) interposed between said flat tubes (4).
2. A multi-flow type sub cool condenser (1000) of claim 1, wherein said desiccant (13) is contained in a container (14).
 3. A multi-flow type sub cool condenser (1000) of claim 2, wherein said container (14) has a skeleton (15) and mesh portion (16).
 4. A multi-flow type sub cool condenser (1000) of claim 2, wherein said container (14) is made from a punched plate.
 5. A multi-flow type sub cool condenser (1000) of claim 1, wherein said desiccant (13) is first contained in a fibrous bag and then is contained in a container (14).
 6. A multi-flow type sub cool condenser (1000) of claim 1, wherein said desiccant (13) is formed as one body integrally by a heat process or by an adhesive, and is then contained in a container (14).
 7. A multi-flow type sub cool condenser (1000) of claim 1, wherein said desiccant (13) is formed as one body integrally by a heat process or by an adhesive, and then contained in said first header pipe (1).
 8. A multi-flow type sub cool condenser (1000) of claim 1, wherein between said desiccant (13) and tips of said heat transfer tubes (4), a gap (18) is provided.
 9. A multi-flow type sub cool condenser (1000) of claim 1, wherein tips of said heat transfer tubes (4) are cut so as to provide a warped gap (18') between said desiccant (13) and them.
 10. A multi-flow type sub cool condenser (1000) of claim 1 or 2, wherein in said first header pipe (1) a partition plate (19) is provided to section said first header pipe into an upper pipe portion (1b) and a lower pipe portion (1a), and said desiccant (13) or said container (14) penetrates through a hole (20) provided in said partition plate (19).
 11. A multi-flow type sub cool condenser (1000) of claim 2, wherein in said first header pipe (1) a partition plate (19) is provided to section said first header pipe into upper pipe portion (1b) and lower pipe portion (1a), and said container (14) of said desiccant (13) penetrates through a hole (20) provided in said partition plate (19), and said container (14) has at its middle portion a flange (21) that engages with said partition plate (19).
 12. A multi-flow type sub cool condenser (1000) of claim 2, wherein in said first header pipe (1) a partition plate (19) is provided to section said first header pipe into upper pipe portion (1b) and lower pipe portion (1a), and said container (14) of said desiccant (13) penetrates through a hole (20) provided in said partition plate (19), and said container (14) comprises a thin diameter portion (14a) and a thick diameter portion (14b), and a shoulder portion between them engages with said partition plate (19).
 13. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (100) comprises a bracket member (123) that is brazed to an end of said first header pipe (1) and having on its interior wall a female screw, a plugging member (124) having on its outer surface a male screw, wherein said plugging member (124) can be screwed into and off said bracket member (123) thereby enabling said desiccant (13) to be exchanged.
 14. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (200) comprises a block member (240) that is brazed to an end of said first header pipe (1) and having a center hole (280) and an internally bored groove (290) and notches (242), a plugging member (243) having on its outer surface a plurality of rectangular projections (244) that can be inserted into said notches (242) and orbited within said internally bored groove (290), wherein said plugging member (243) can be screwed into and off said block member (240), thereby enabling said desiccant (13) to be exchanged.
 15. A multi-flow type sub cool condenser (1000) of claim 14, wherein instead of rectangular projections said plugging member (245) has a plurality of cylindrical shaped pins (246) made as separate parts.
 16. A multi-flow type sub cool condenser (1000) of claim 14 wherein instead of rectangular projections said plugging member (245) has a plurality of cylindrical shaped pins (246) are made integrally with said plugging member.
 17. A multi-flow type sub cool condenser (1000) of

claim 1, wherein said plugging mechanism (200) comprises an end of said first header pipe (1) from which a pair of rectangular portions (250) are cut out, a bracket member (251) that is brazed to an end of said first header pipe (1) and having an inwardly pointing flange (253) and a couple of notches (252) and, a plugging member (254) having on its outer surface a plurality of rectangular projections (255) that can be inserted into said notches (252) and orbited within said cut out portions (250) of said end of said first header pipe (1), wherein said plugging member (254) can be screwed into and off said bracket member (251), thereby enabling said desiccant (13) to be exchanged.

18. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (200) comprises an expanded portion (257) of said first header pipe (1) to which a plurality of rectangular notches (256) are provided, and a plugging member (258) having on its outer surface a plurality of rectangular projections (259) that can be inserted into said notches (256) and orbited within said expanded portion (257) of said end of said first header pipe (1), wherein said plugging member (258) can be screwed into and off said expanded portion (257), thereby enabling said desiccant (13) to be exchanged.

19. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (300) comprises a block member (320) that is brazed to an end of said first header pipe (1) and having a center hole (280) and a couple of slits (324) that is in connection with said center hole (280) and provided in a plane perpendicular to the axis of said first header pipe (1), a U-shaped stopper member (327) that is inserted into said slits, and a plugging member (325) having on its outer surface a circular groove (326), wherein said plugging member can be straightly inserted into said block member and locked by inserting said stopper member into said slits, and said plugging member can be released by pulling out said stopper member from said slits, thereby enabling said desiccant (13) to be exchanged.

20. A multi flow type sub cool condenser (1000) of claim 19, wherein said stopper member has arms of a length that can be folded to embrace said block member (320) after it is inserted into said slits (324).

21. A multi-flow type sub cool condenser (1000) of claim 19, wherein said stopper member has for one arm a length that can be folded to embrace said block member (320) and engage with the tip of the other arm after said stopper member (333) is inserted into said slits (324).

22. A multi-flow type sub cool condenser (1000) of claim 19, wherein a side plate (16) that is brazed to the outermost corrugated fin (5) has at its terminal end a couple of ear portions (340) having holes for passing a bolt, and said stopper member (338) has in its arms a hole (343a) and a female screw (343b), wherein after adjusting these holes and female screw, a bolt (341) can be screwed to fix them and can be released, thereby enabling said desiccant to be exchanged.

23. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (300) comprises a block member (347) that is brazed to an end of said first header pipe (1) and having a center hole (280) and a couple of slits (348) that is in connection with said center hole (280) and provided in a plane perpendicular to the axis of said first header pipe (1), a U-shaped stopper member (346) that is inserted into said slits, and a plugging member (345) having a outer surface (344b), wherein said plugging member can be straightly inserted into said block member (347) and locked by inserting said stopper member into said slits, and said plugging member can be released by pulling out said stopper member from said slits, thereby enabling said desiccant (13) to be exchanged, wherein in a state in which said plugging member is locked, only one lateral side surface (346b) of said stopper member is engaging with said outer surface (344b) of said plugging member.

24. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (400) comprises a flange member (426) that is brazed to an end of said first header pipe (1) and having a center hole (280) and a couple of side flanges (428) to which female screw member (430) is attached, and a plugging member (421) having a center portion (433) that is inserted into said center hole (280) and fixed by screws (431), wherein said plugging member (421) can be straightly inserted into said flange member (426) and locked by said screws (431) screwed into said female screw member (430) via said side flange (428), and said plugging member (421) can also be detached by unbolting, thereby enabling said desiccant (13) to be exchanged.

25. A multi-flow type sub cool condenser (1000) of claim 14, 19 or 24, wherein around said plugging member (243, 325, 421) is fitted an O-ring (249, 328, 434) for hermetical sealing.

26. A multi-flow type sub cool condenser (1000) of claim 24, wherein in the middle portion of said female screw member (430) an expanded portion (435) is provided to limit the insertion length of said screw member (430) into said side flange (428).

27. A multi-flow type sub cool condenser (1000) of claim 1, wherein said plugging mechanism (400) comprises a flange member (440) that is brazed to an end of said first header pipe (1) and having a center hole (280) and an overhanged flange (438) 5 and a portion made by folding and squashing the other flange to which female screw (441) is bored, and a plugging member (437) having a side flange (437b) and a center portion (433) that is inserted into said center hole (280) and fixed by screws (431) 10 and having a short flange (437a) that engages with said overhanged flange (438), wherein said plugging member (437) can be straightly inserted into said flange member (440) and locked by single screw (431) screwed into said female screw (441) 15 via said side flange (437b), and said plugging member (437) can also be detached by unbolting, thereby enabling said desiccant (13) to be exchanged.

20

25

30


35

40

45

50

55

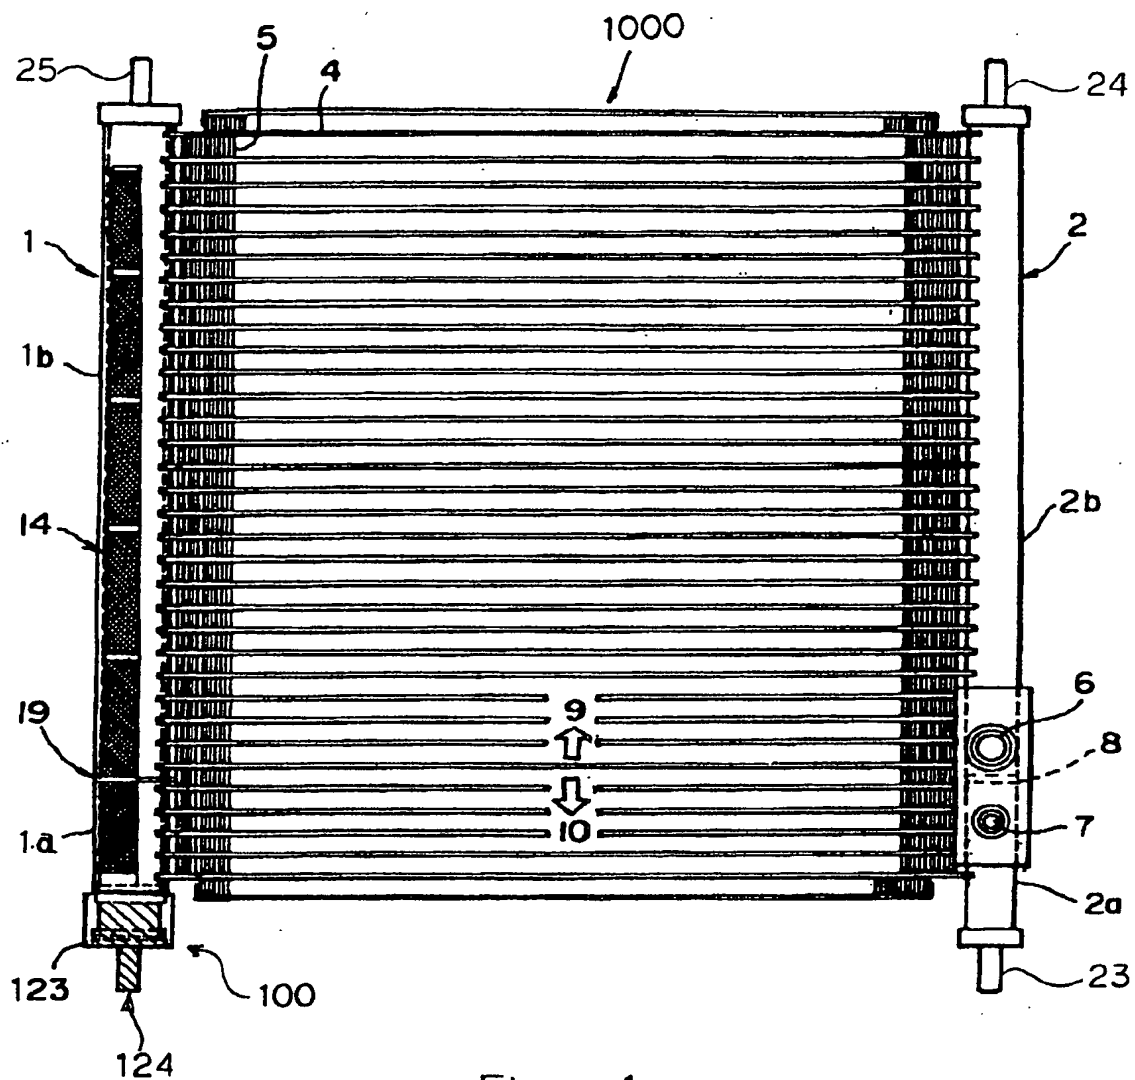

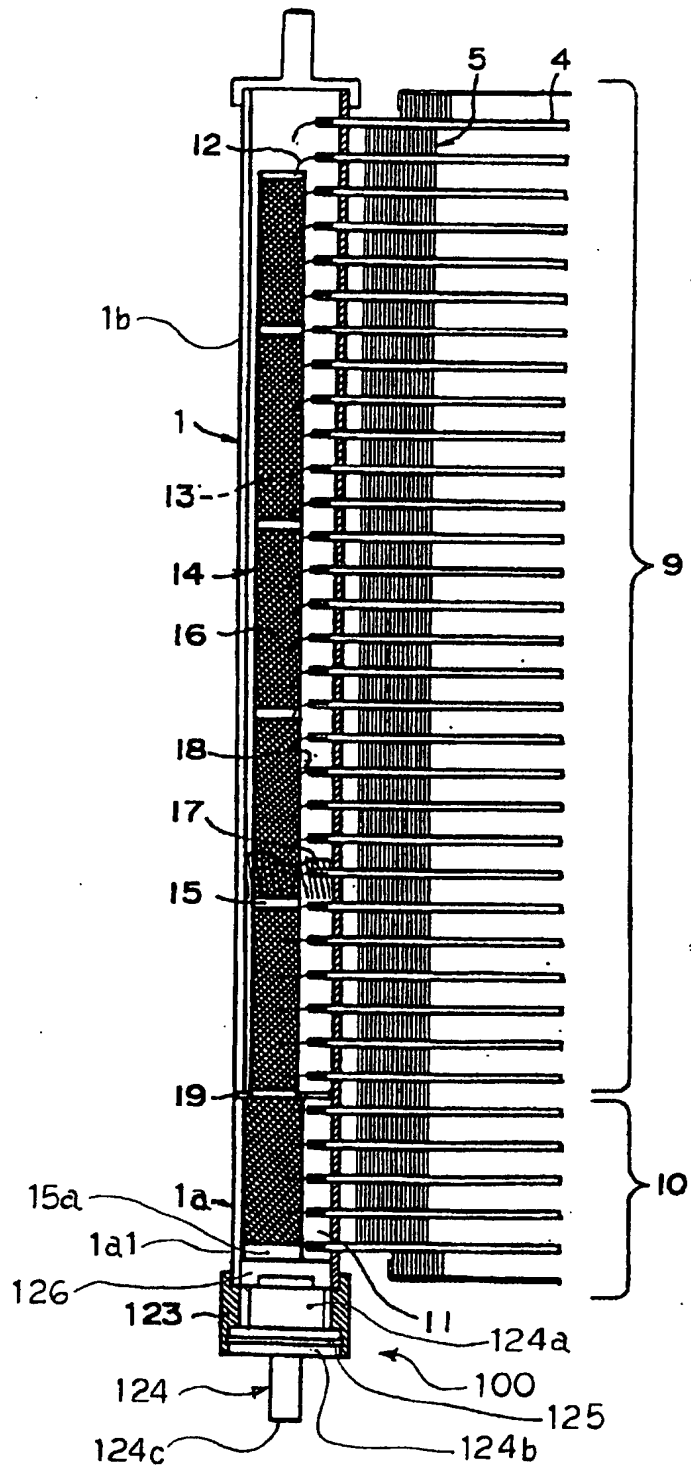


Fig. 2

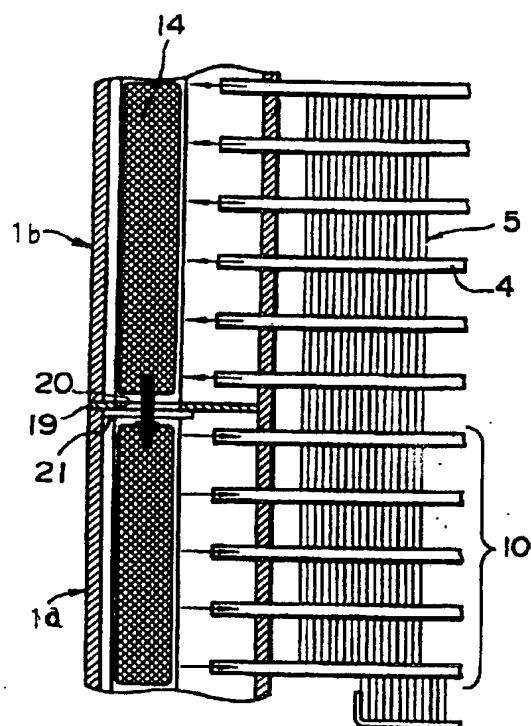


Fig. 3

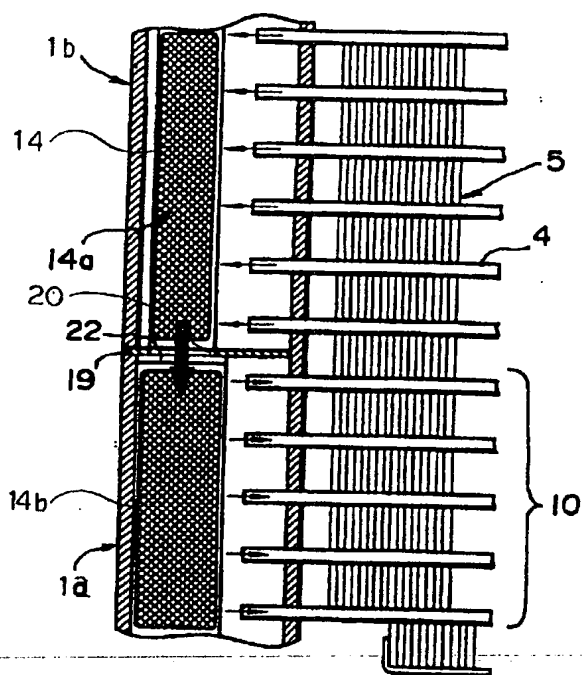


Fig. 4

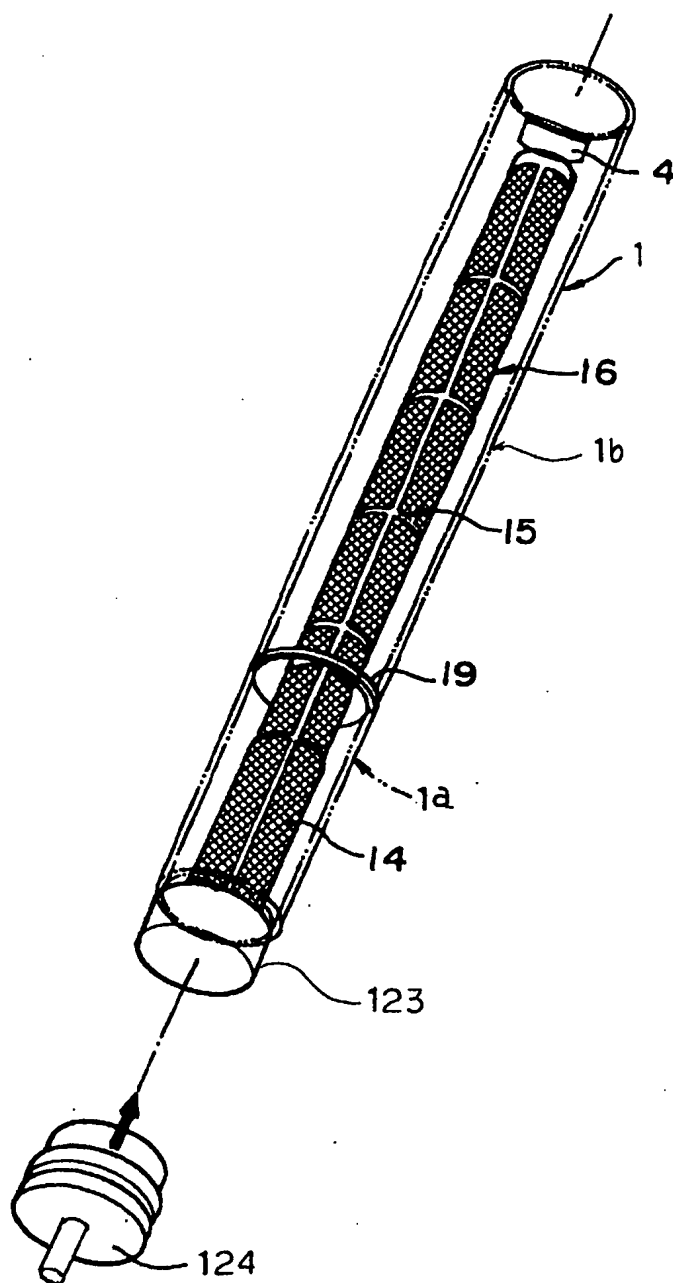


Fig . 5

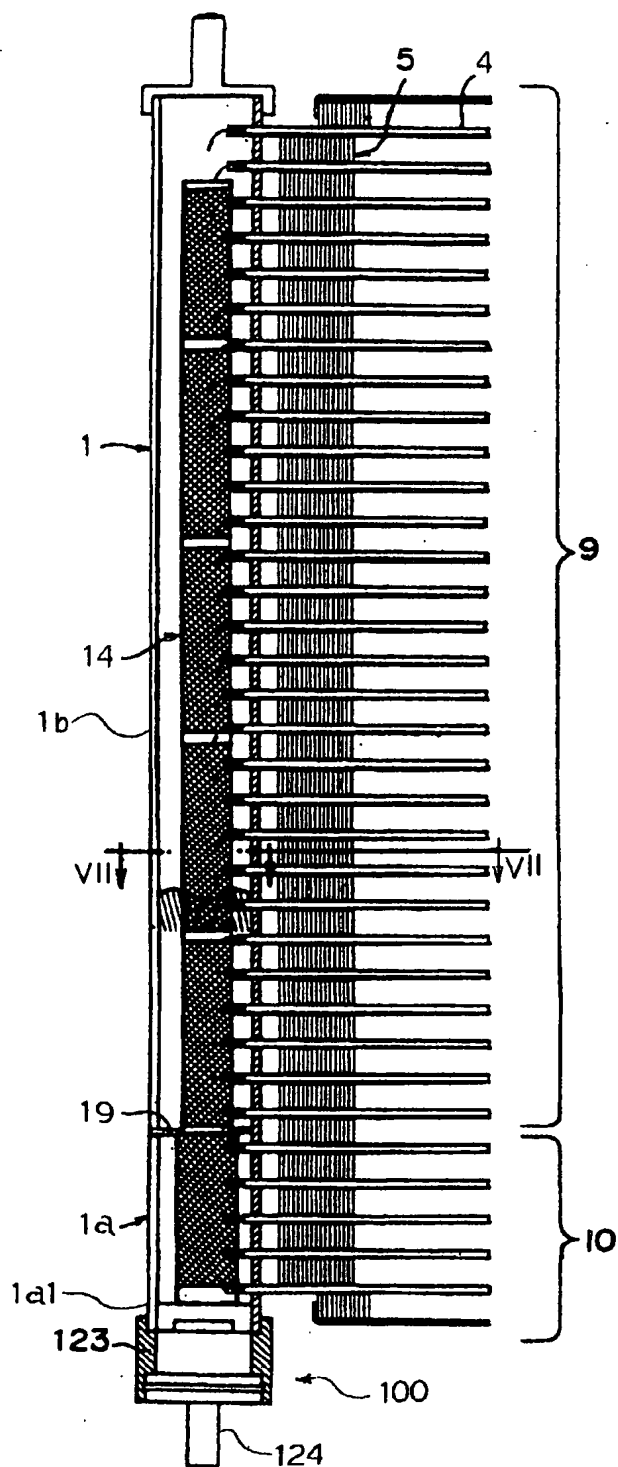


Fig . 6

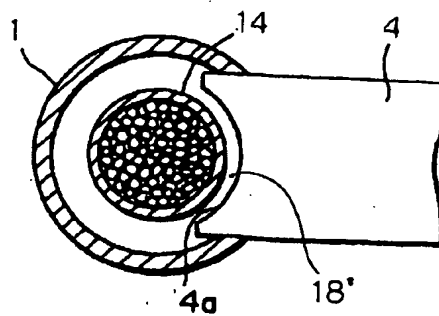


Fig . 7

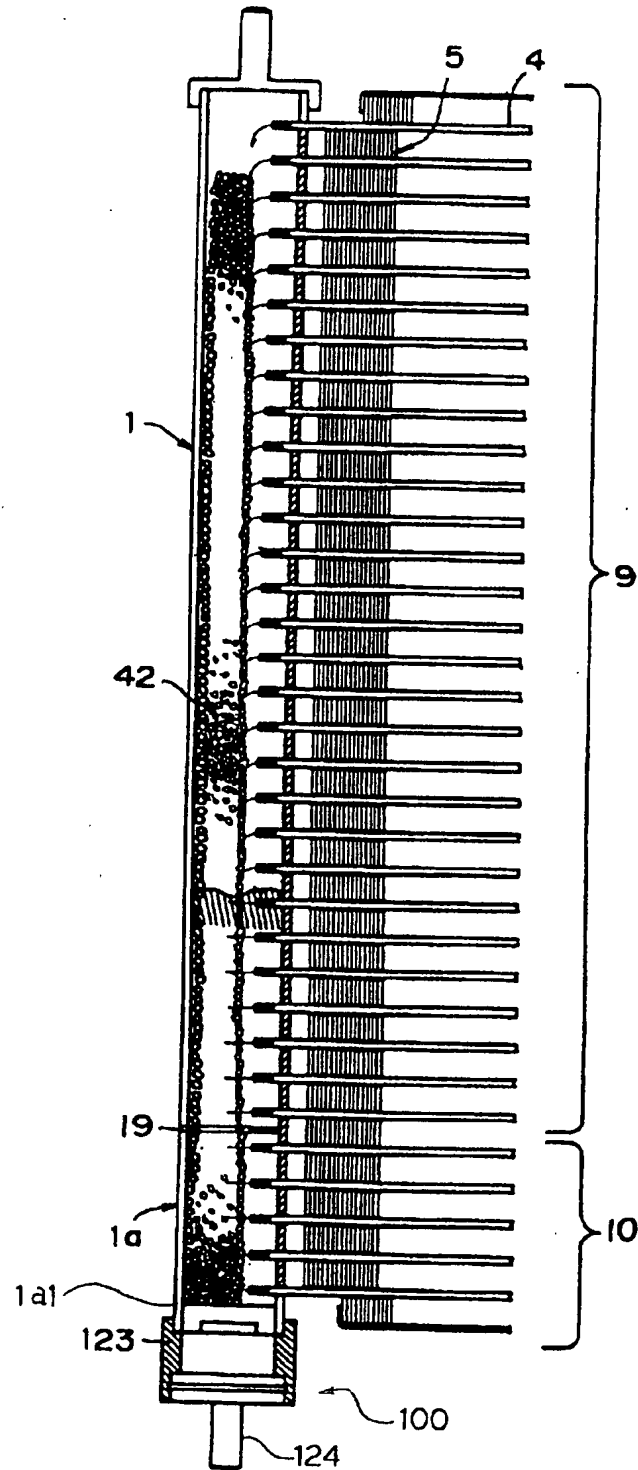


Fig. 8

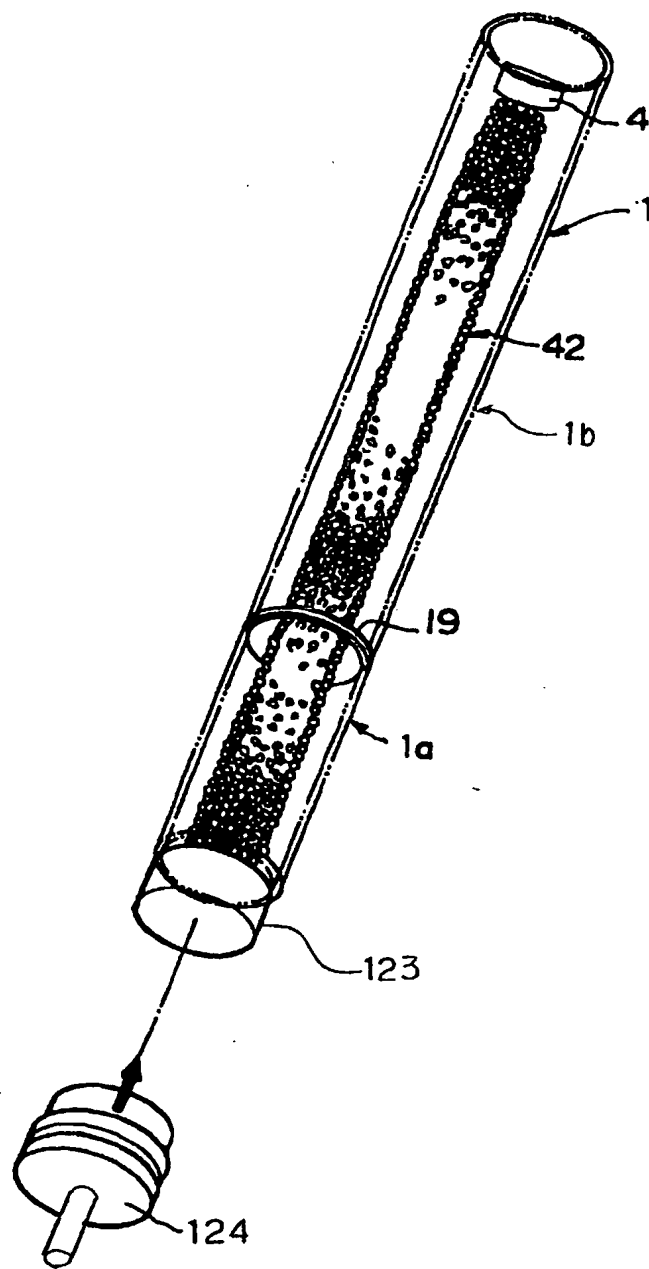


Fig . 9

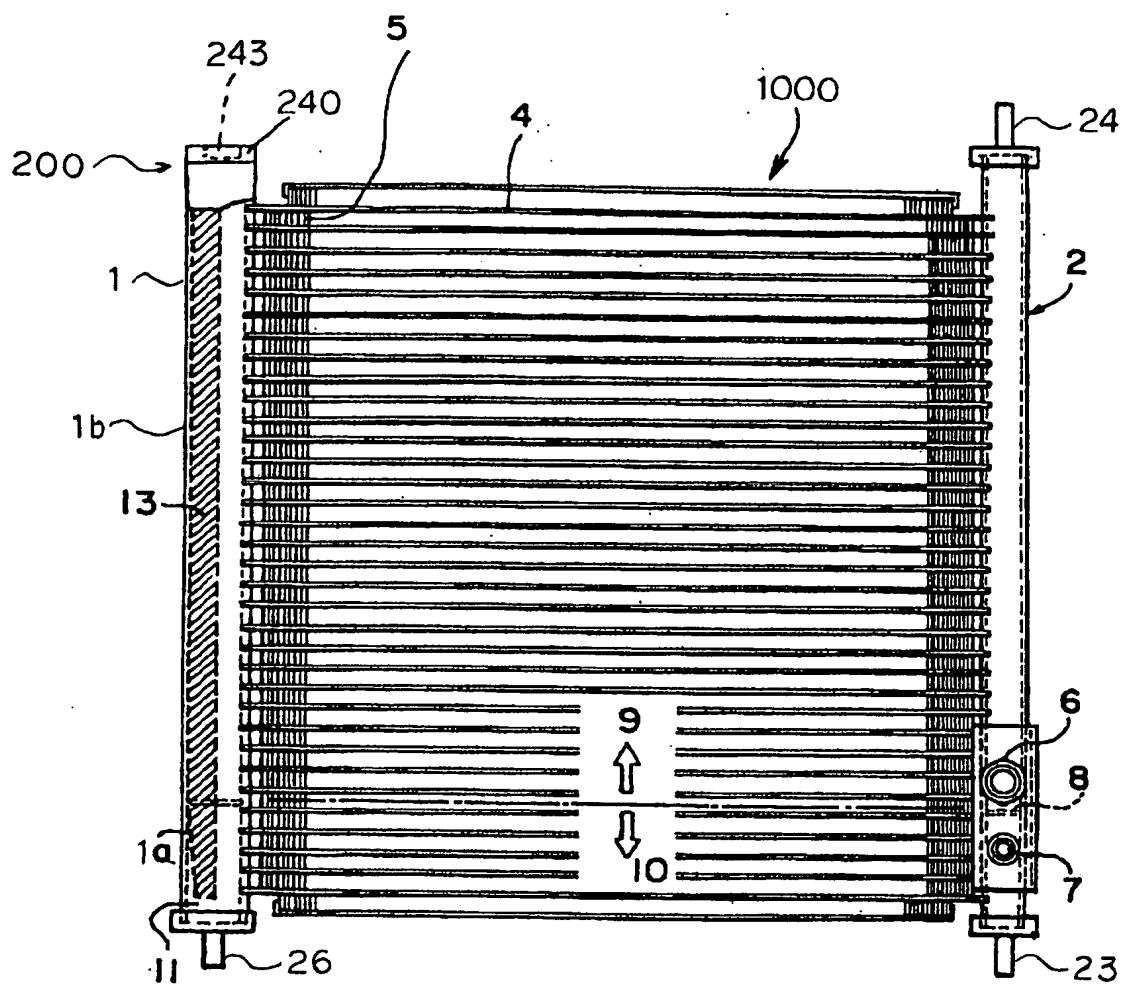


Fig . 10

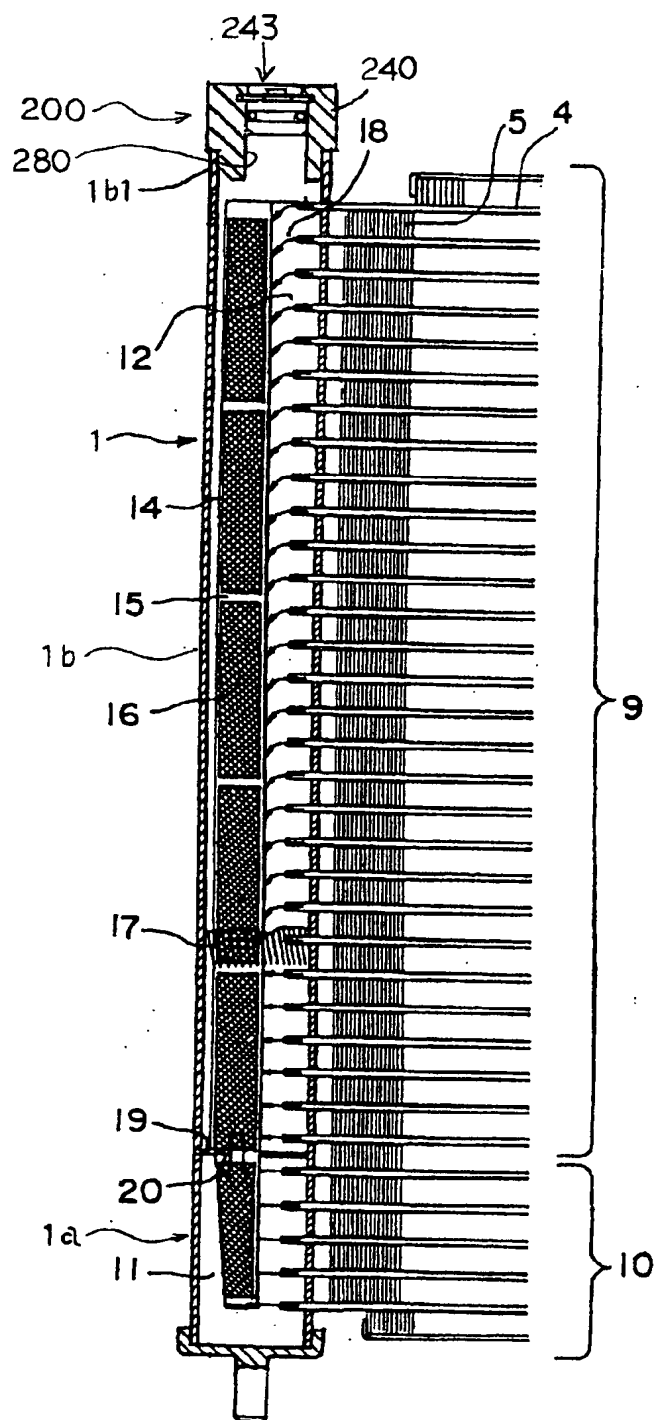


Fig. 11

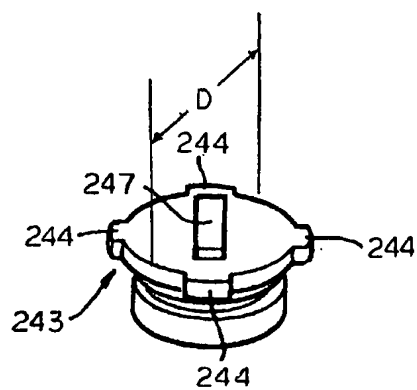


Fig . 12

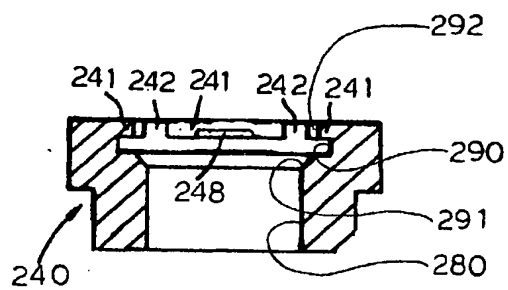


Fig . 13

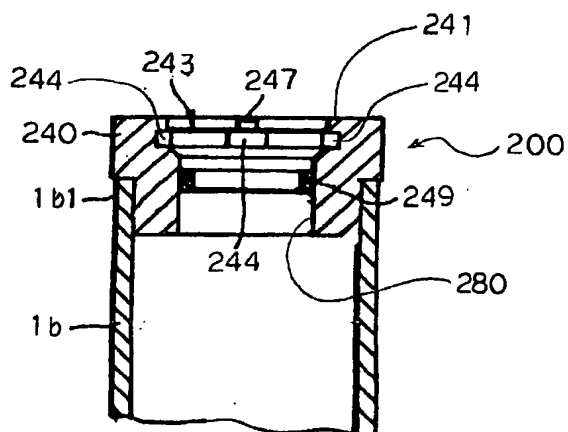


Fig . 14

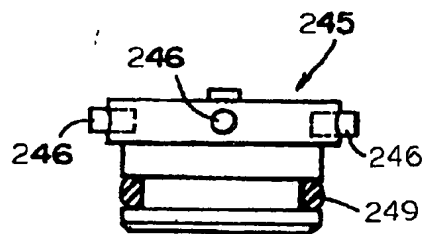
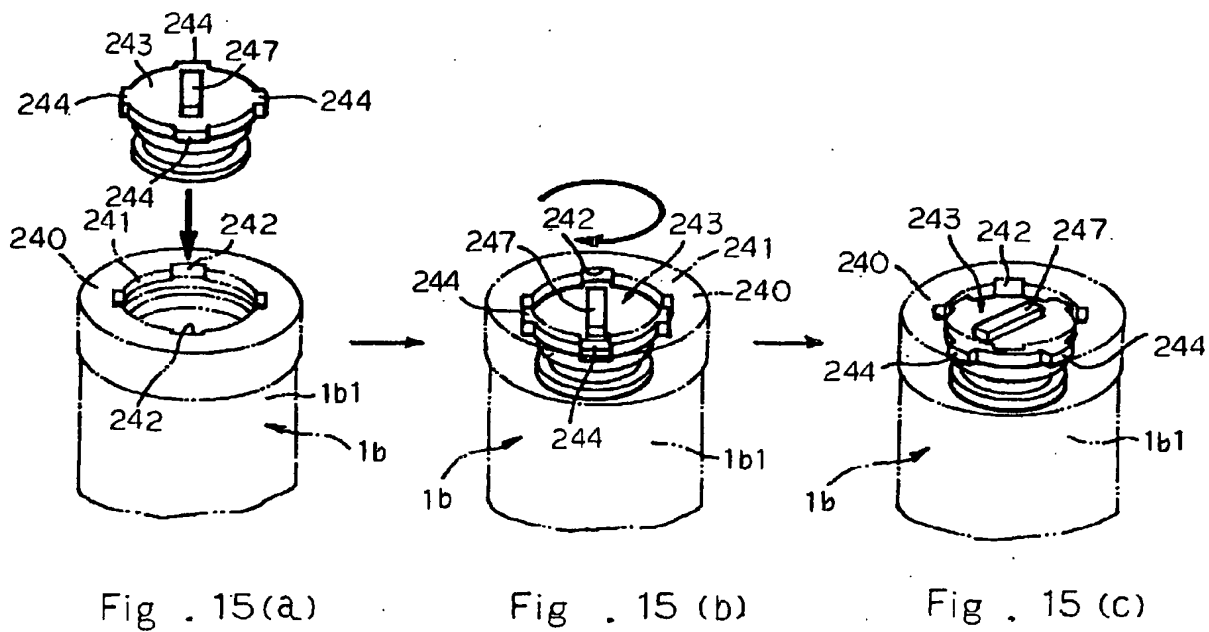
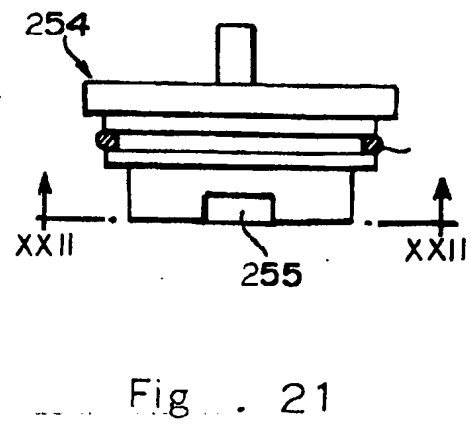
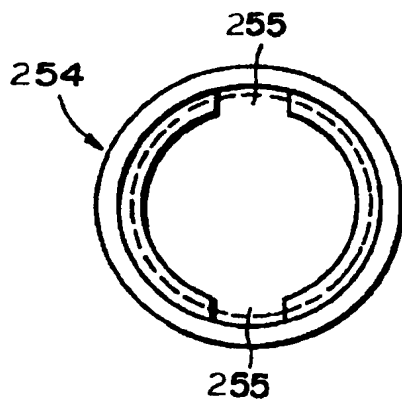
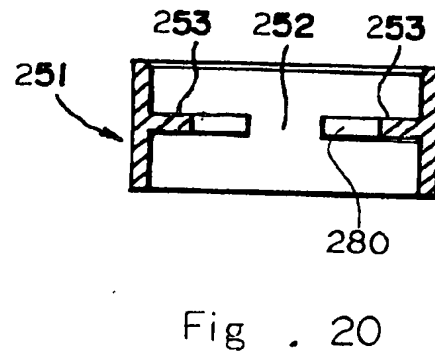
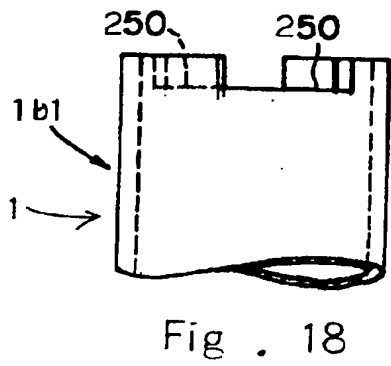
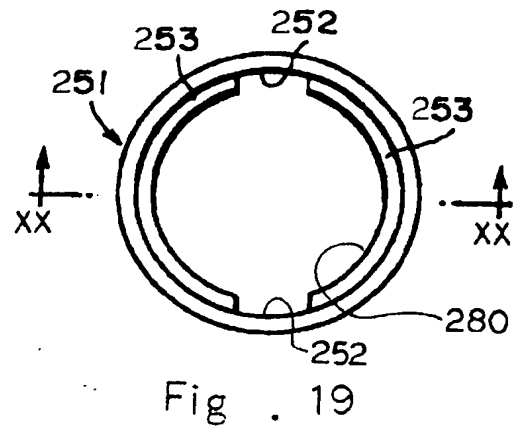
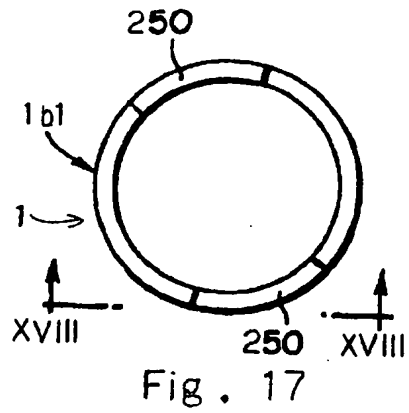


Fig. 16



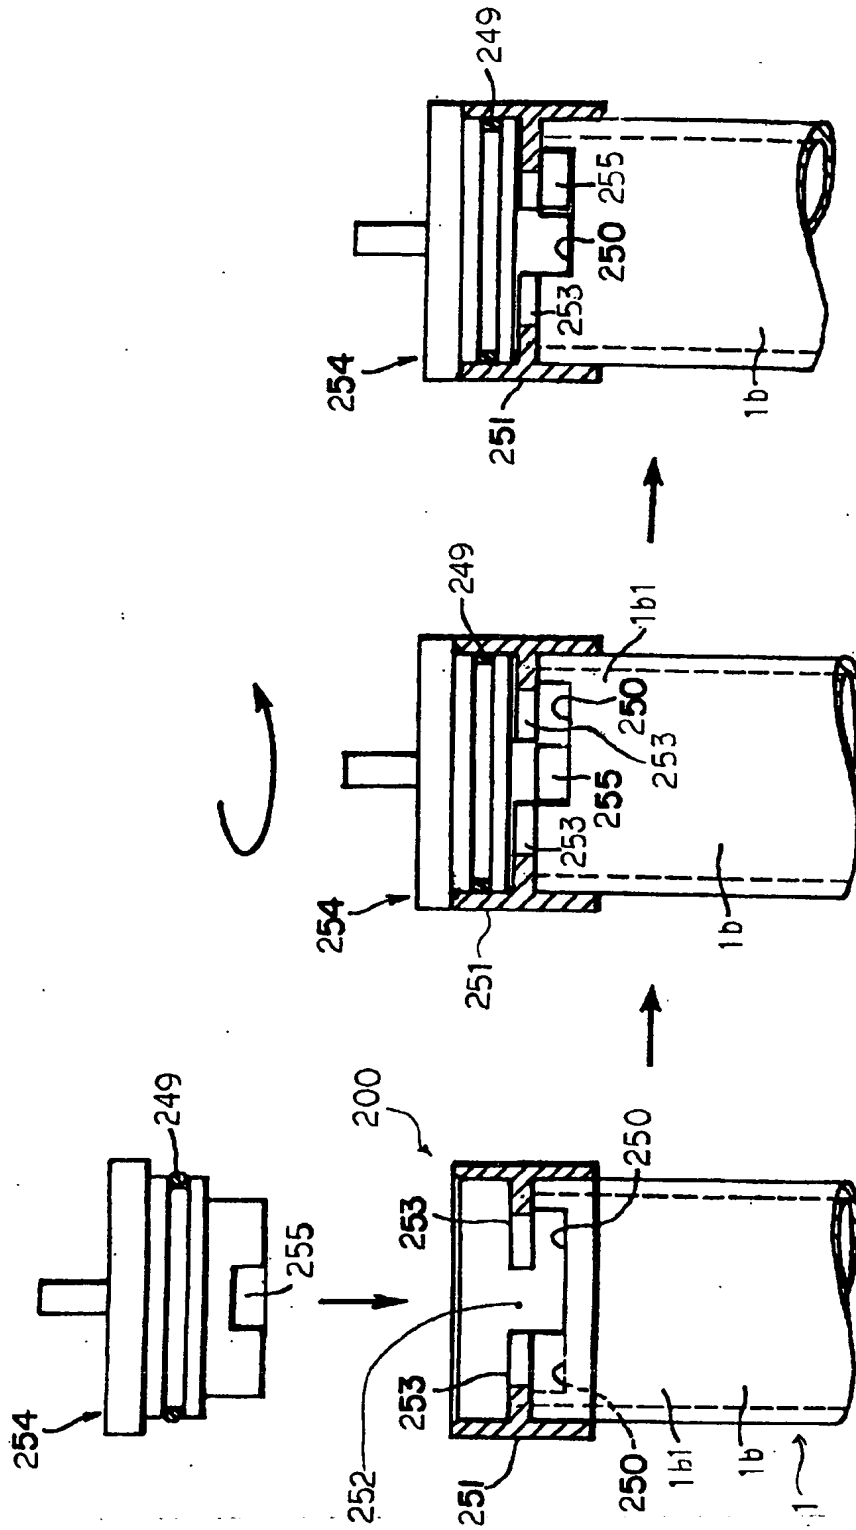


Fig. 23(c)

Fig. 23(b)

Fig. 23(a)

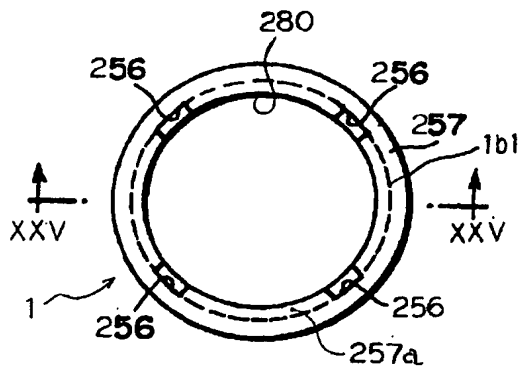


Fig. 24

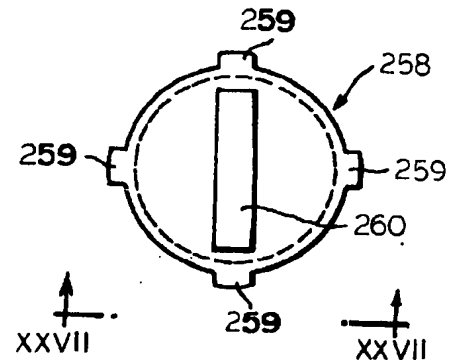


Fig. 26

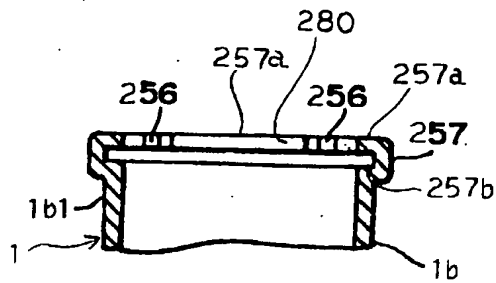


Fig. 25

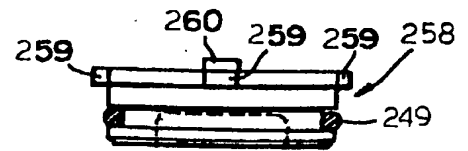


Fig. 27

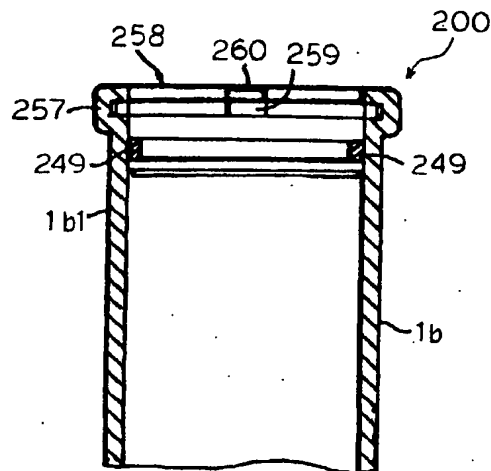


Fig. 28




Fig. 29

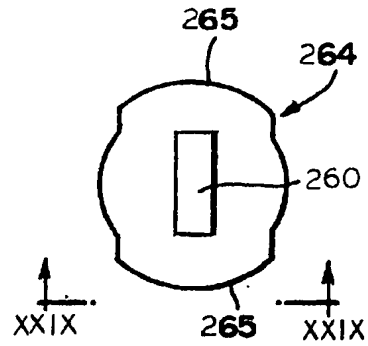


Fig. 30

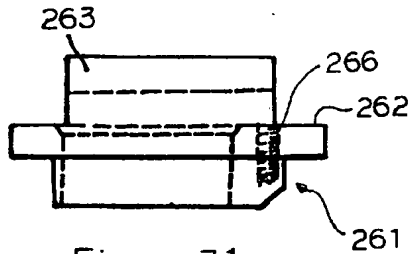


Fig. 31

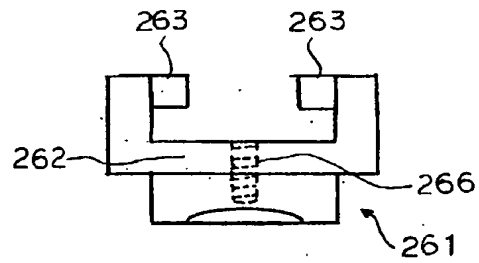


Fig. 32

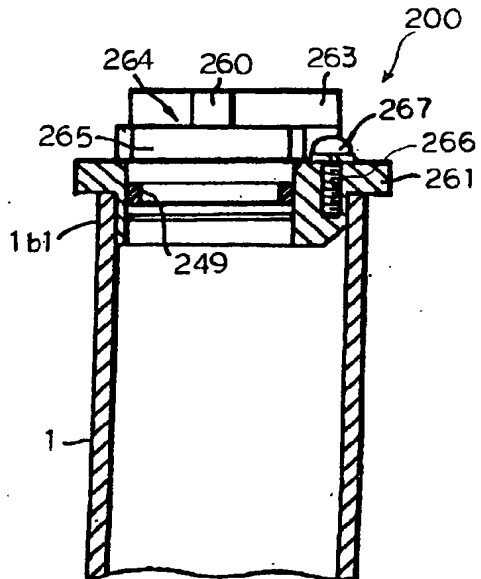


Fig. 34

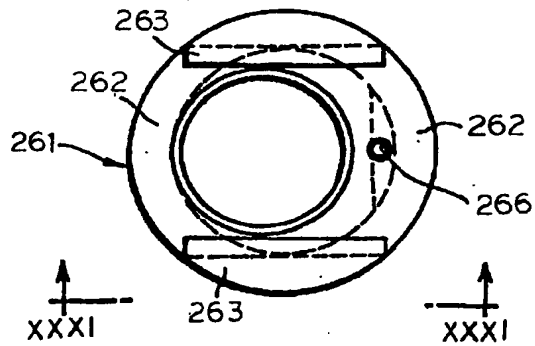
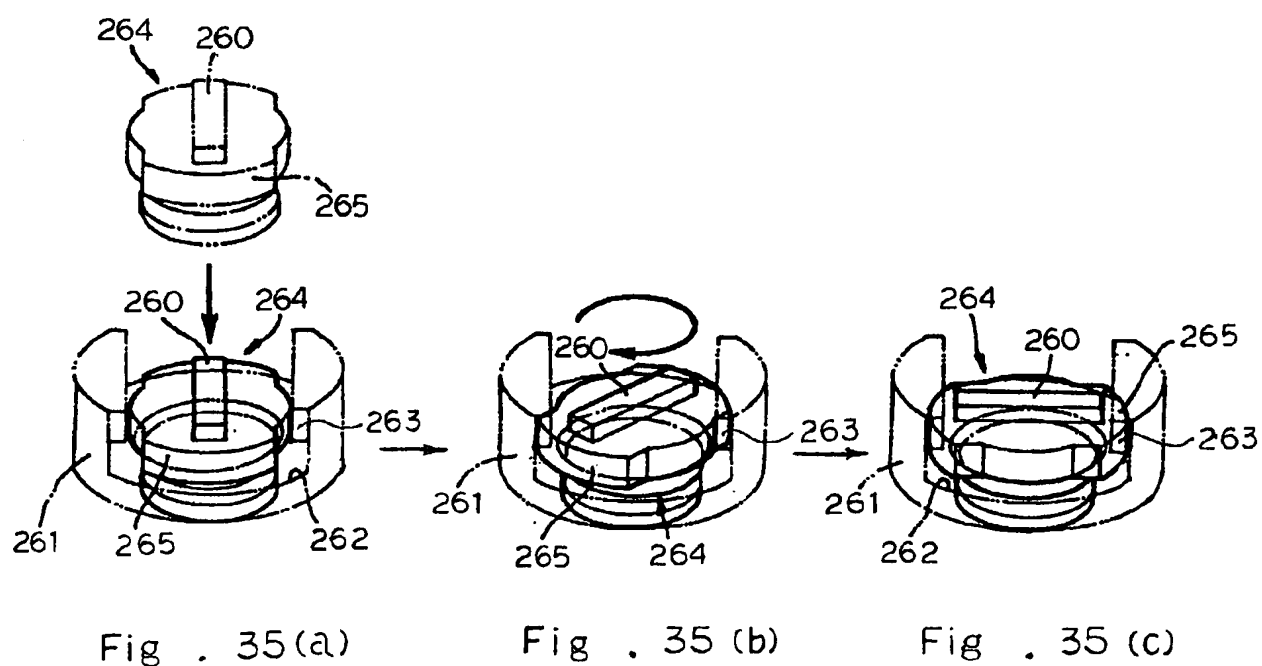
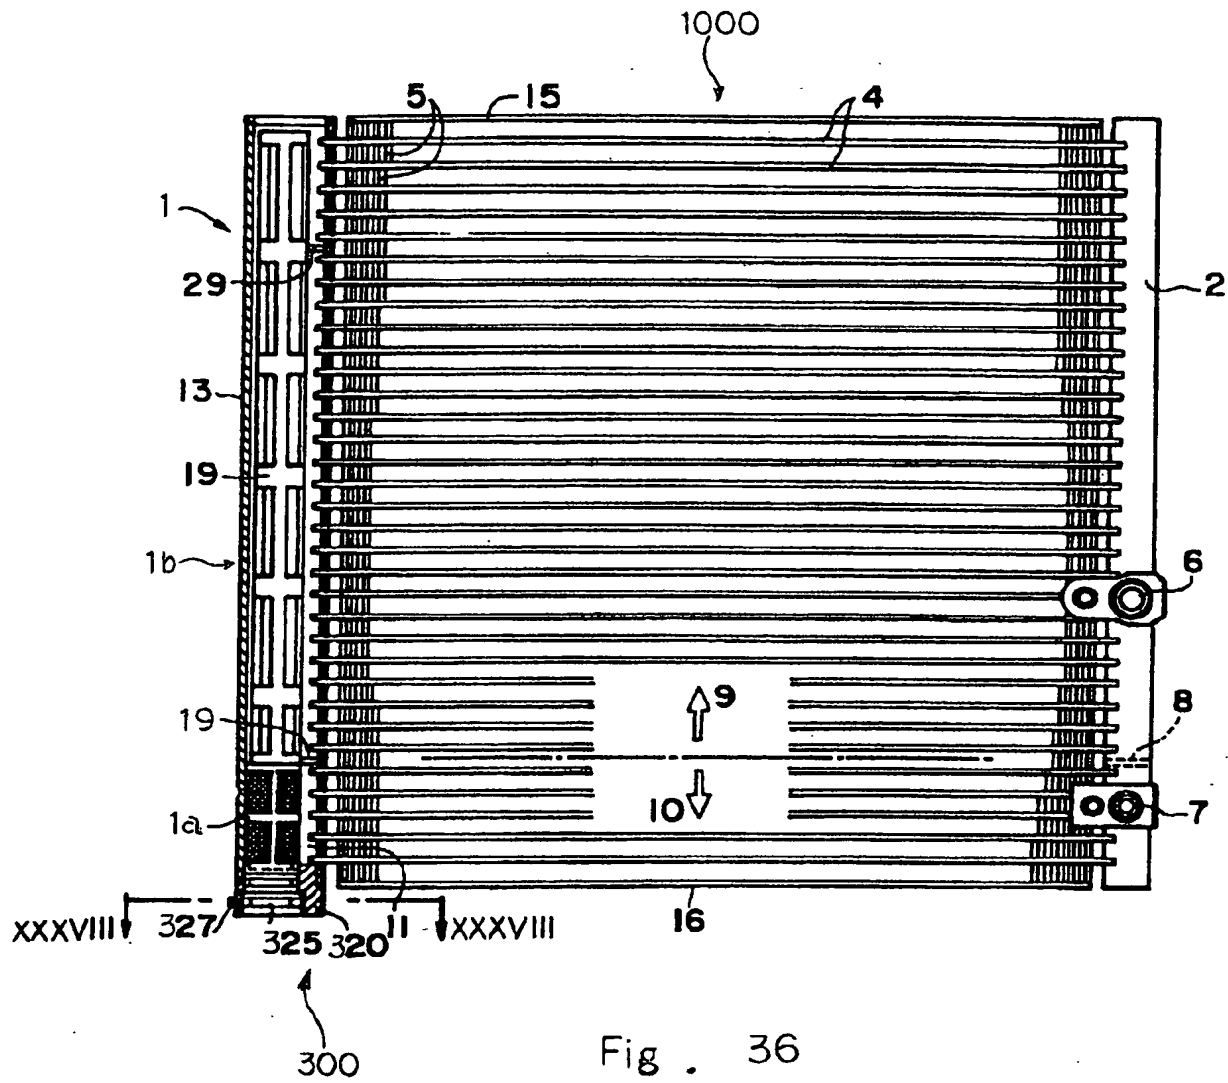


Fig. 33





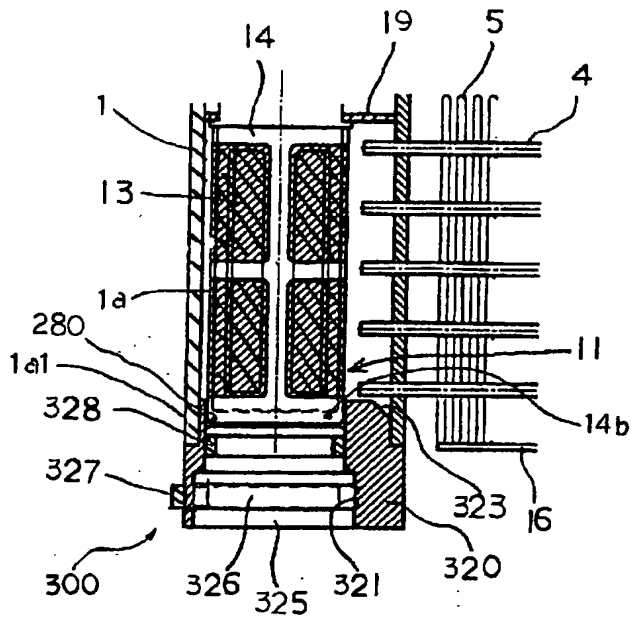


Fig . 37

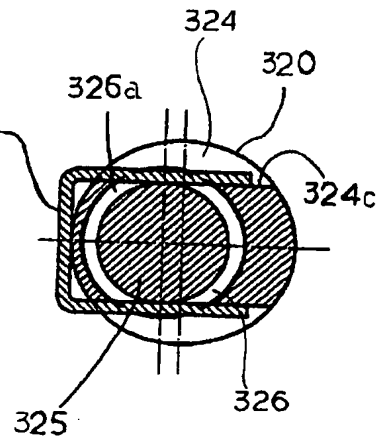


Fig . 38

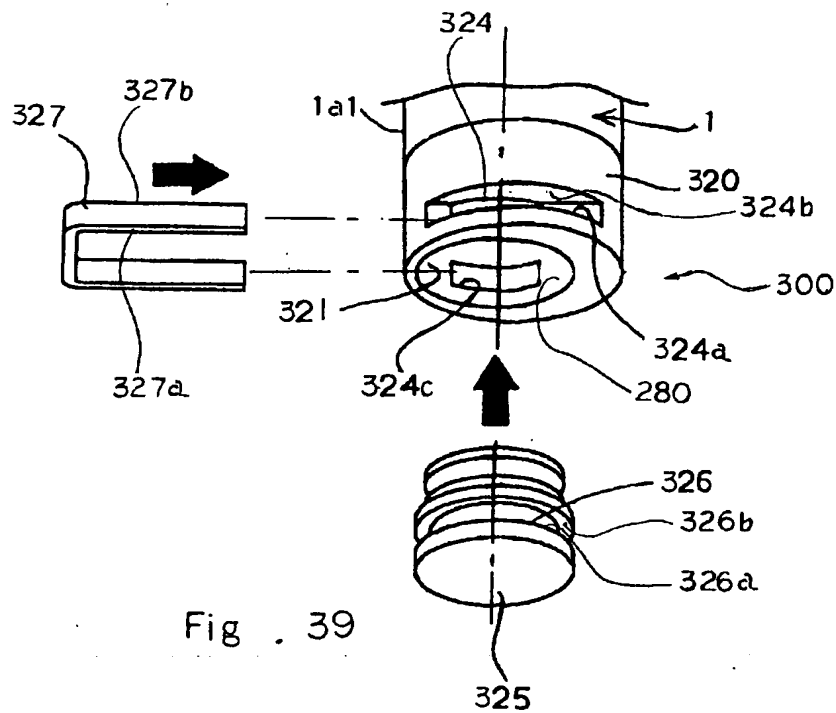
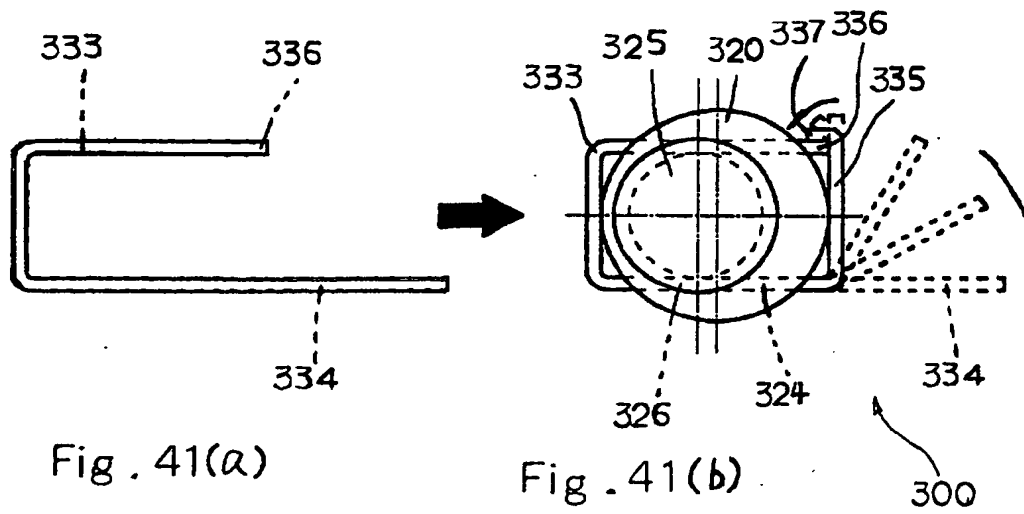
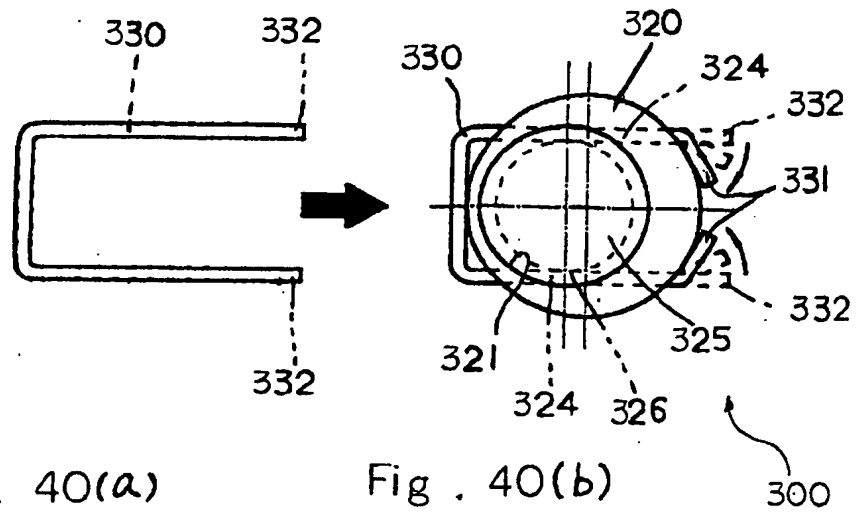


Fig . 39



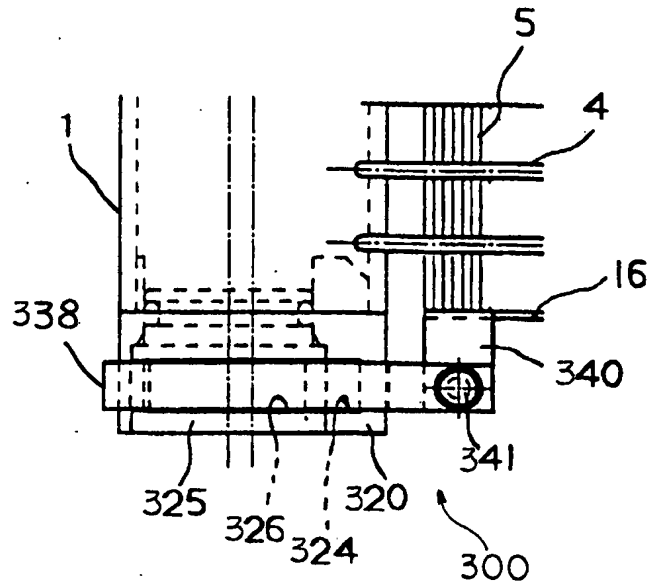


Fig . 42

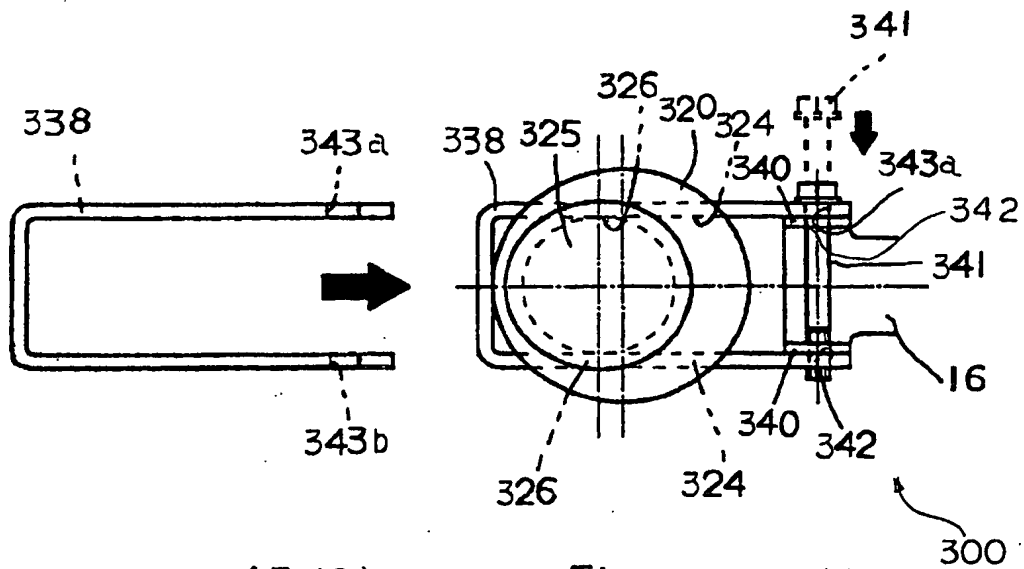


Fig . 43 (a)

Fig . 43 (b)

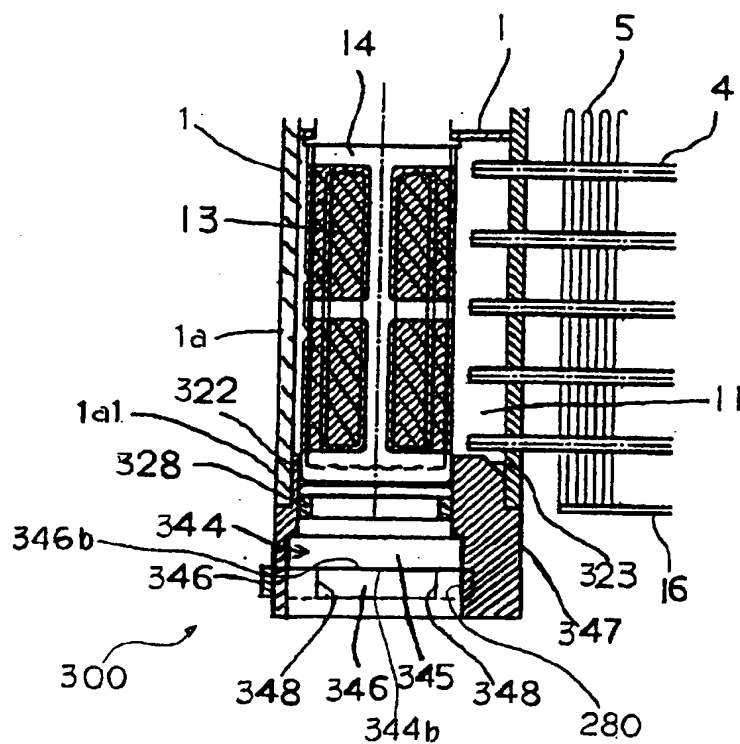


Fig. 44

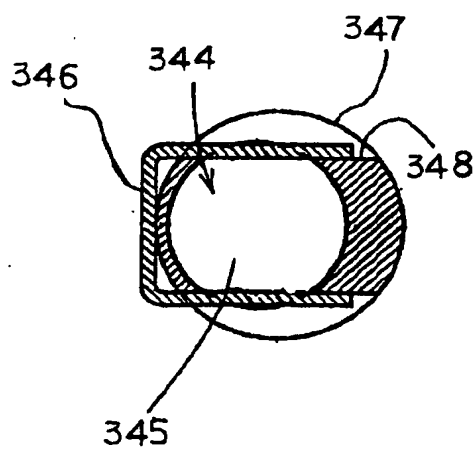


Fig. 45

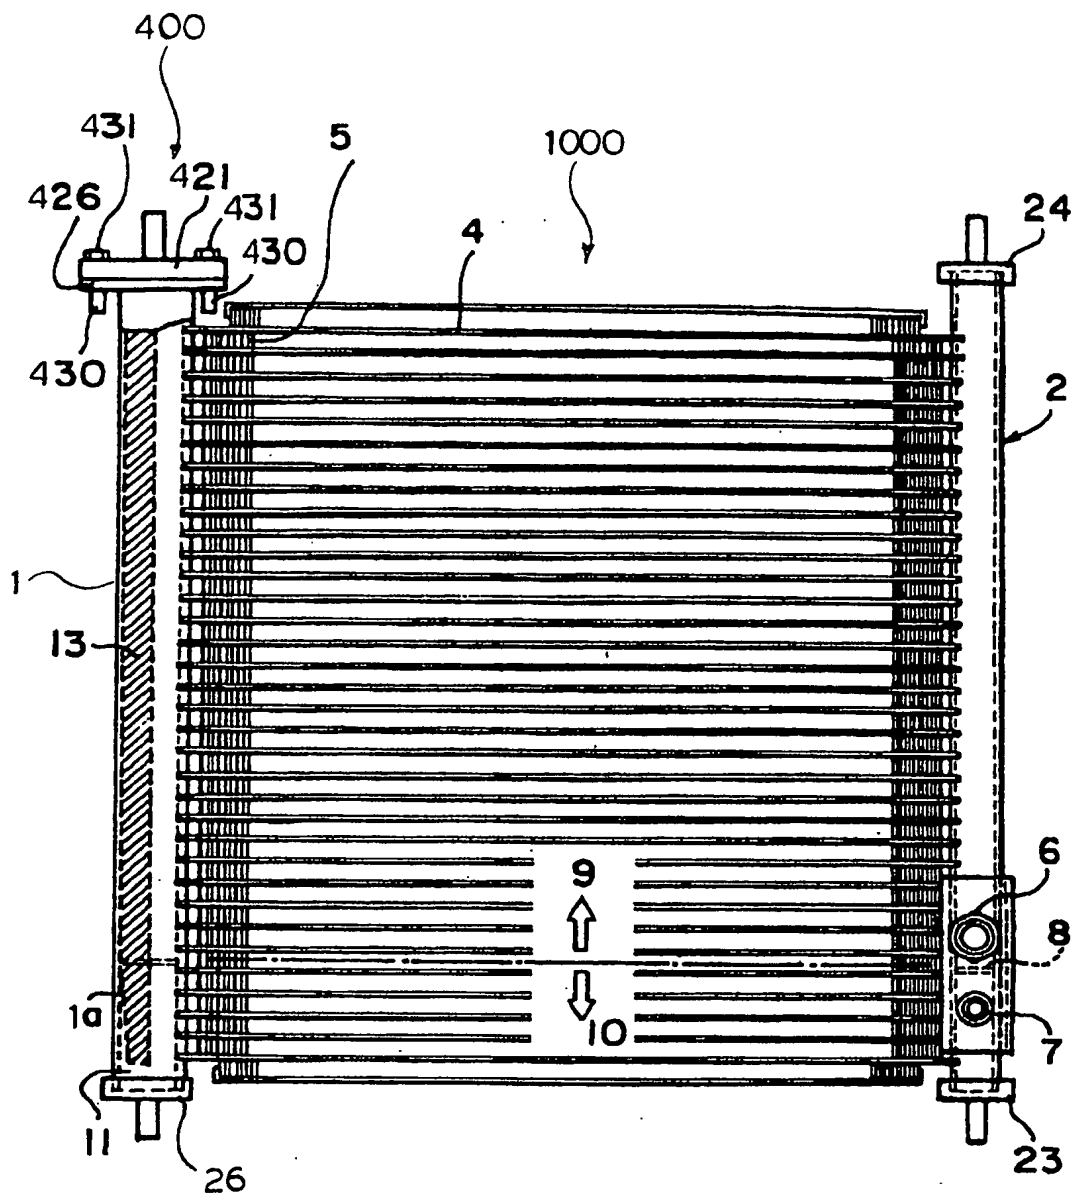


Fig . 46

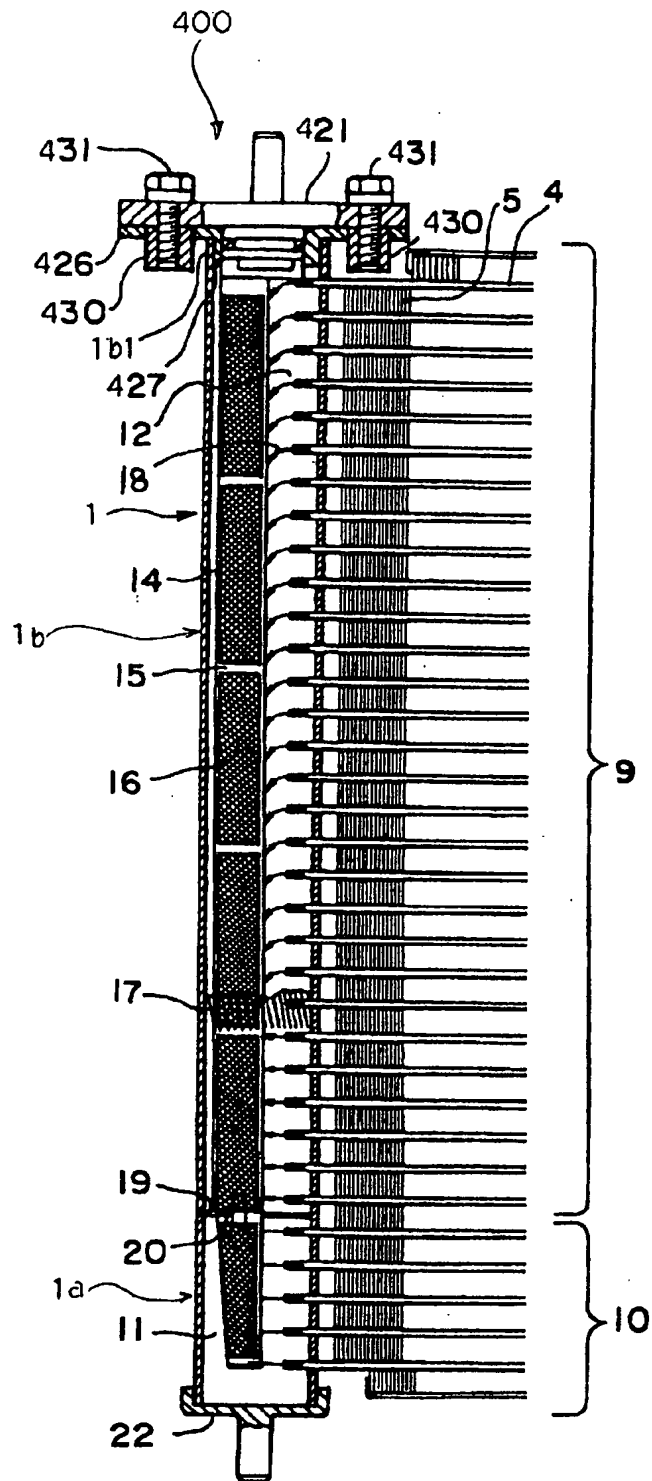


Fig . 47

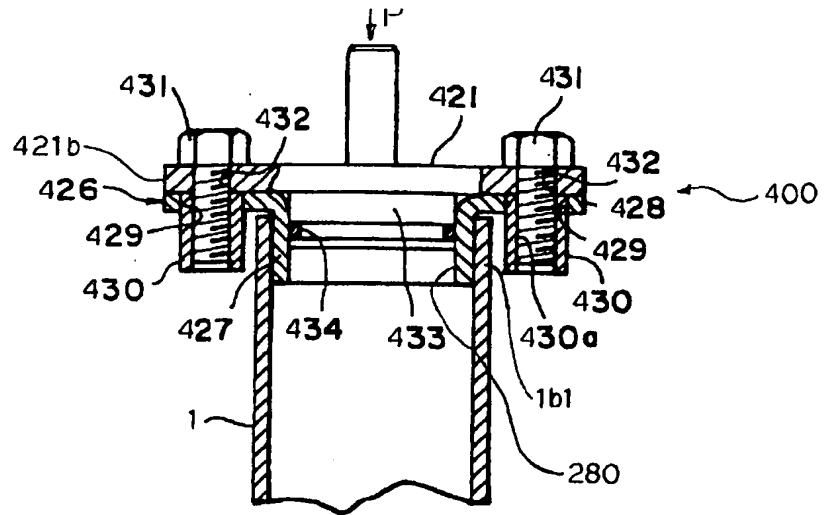


Fig. 48

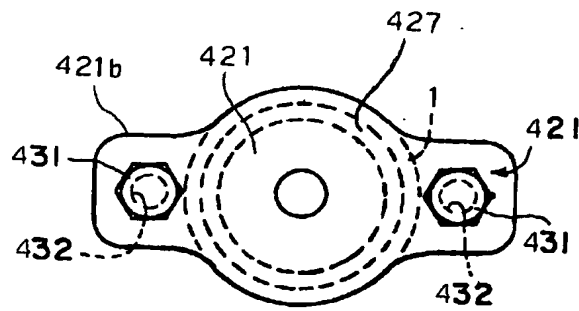


Fig. 49

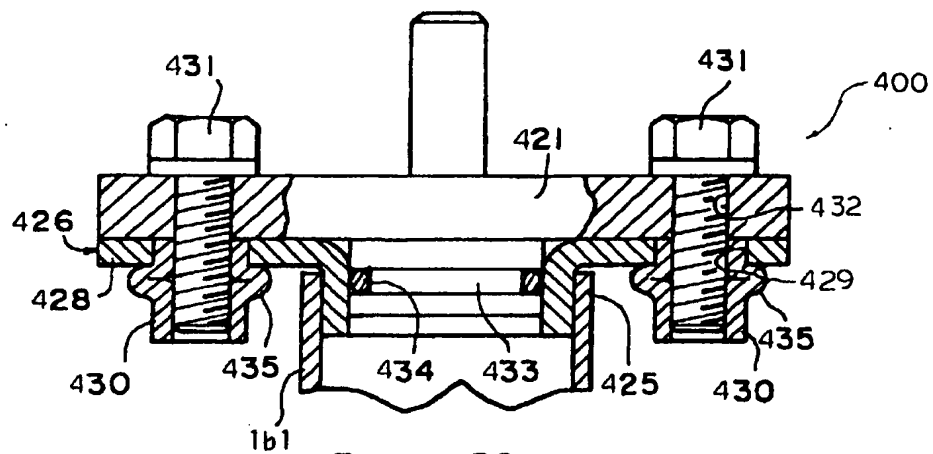


Fig. 50

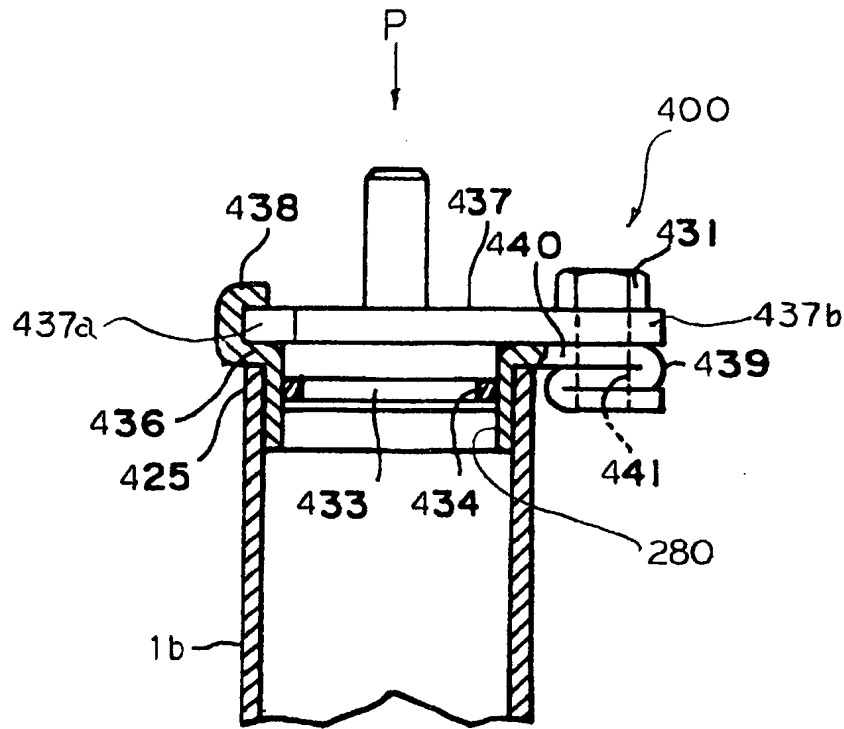


Fig . 51


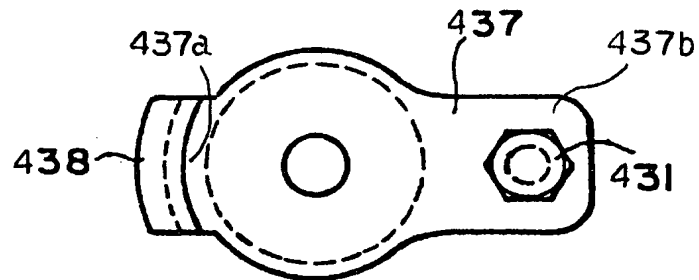


Fig . 52



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 249 672 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
07.07.2004 Bulletin 2004/28

(51) Int Cl.7: **F25B 39/04, F28F 9/02**

(43) Date of publication A2:
16.10.2002 Bulletin 2002/42

(21) Application number: **02251912.8**

(22) Date of filing: **18.03.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 10.04.2001 JP 2001111202
22.05.2001 JP 2001152248
18.06.2001 JP 2001183033
26.09.2001 JP 2001293968

(71) Applicant: **Sanden Corporation**
Isesaki-shi, Gunma 372-8502 (JP)

(72) Inventors:
• **Kado, Hirotaka**
Isesaki-shi, Gunma 372-8502 (JP)

- **Wada, Kenichi**
Ohta-shi, Gunma 373-8588 (JP)
- **Kamishima, Hiromitsu**
Ohta-shi, Gunma 373-8588 (JP)
- **Shinmura, Toshiharu**
Ohta-shi, Gunma 373-8588 (JP)
- **Watase, Daisuke**
Ohta-shi, Gunma 373-8588 (JP)
- **Oakada, Shigeru**
Ohta-shi, Gunma 373-8588 (JP)

(74) Representative: **Haley, Stephen**
Gill Jennings & Every,
Broadgate House,
7 Eldon Street
London EC2M 7LH (GB)

(54) **Multi-flow type sub cool condenser**

(57) A multi-flow type sub cool condenser (1000) comprises a first header pipe (1), having at one end a plugging mechanism (100, 200, 300, 400) in which a plugging member can be fastened or unfastened at will manually and which enables a desiccant (13), having a length comparable to that of said first header pipe, to be put in and taken out of said first header pipe. A second header pipe (2), the interior of which is sectioned into two chambers (2a, 2b) by a partition plate (8). A plurality of flat heat transfer tubes (4) interconnect said first and second header pipes, and a plurality of corrugated fins (5) are interposed between said flat tubes (4).

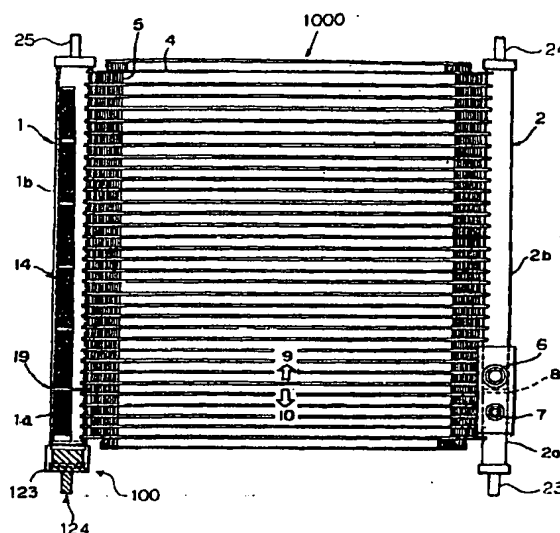


Fig. 1

EP 1 249 672 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1912

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 992 378 A (MAGNETI MARELLI CLIMAT SRL) 12 April 2000 (2000-04-12) * column 2, line 3 - line 37; figures 1,2 *	1,2,5,6,8,9	F25B39/04 F28F9/02
Y	* the whole document *	3,4,8-11,13-27	
X	DE 92 19 184 U (BEHR GMBH & CO) 2 June 1999 (1999-06-02) * page 9, paragraph 3; claim 1; figures 1,10 *	1,2,5,13	
Y	* the whole document *	3,4,6,7,9-11	
X	FR 2 757 612 A (VALEO THERMIQUE MOTEUR) 26 June 1998 (1998-06-26) * claims 1,4; figure 4 *	1,2,5	
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 06, 22 September 2000 (2000-09-22) & JP 2000 074528 A (SHOWA ALUM CORP), 14 March 2000 (2000-03-14) * abstract *	1,2,13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F25B F28F
X	EP 0 886 113 A (HALLA CLIMATE CONTROL CORP) 23 December 1998 (1998-12-23) * column 19, line 26 - line 35; claims 1,8; figure 13 * * column 5, line 1 - line 3 *	1	
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 11, 30 September 1998 (1998-09-30) & JP 10 160287 A (CALSONIC CORP), 19 June 1998 (1998-06-19) * abstract *	8-11	
-/-			
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 29 April 2004	Examiner Ritter, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (p.1/2)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1912

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)	
Y	EP 1 079 186 A (DELPHI TECH INC) 28 February 2001 (2001-02-28) * the whole document *	3-8		
Y	US 5 992 174 A (MITTELSTRASS HAGEN) 30 November 1999 (1999-11-30) * the whole document *	3-8,13		
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 15, 6 April 2001 (2001-04-06) & JP 2000 346500 A (SANDEN CORP), 15 December 2000 (2000-12-15) * abstract *	3-8,13		
Y	DE 100 39 260 A (BEHR GMBH & CO) 22 March 2001 (2001-03-22) * the whole document *	19-23		
Y	PATENT ABSTRACTS OF JAPAN vol. 1998, no. 04, 31 March 1998 (1998-03-31) & JP 09 324962 A (DENSO CORP), 16 December 1997 (1997-12-16) * abstract *	13		TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	US 3 006 499 A (CORBETT PHILIP W) 31 October 1961 (1961-10-31) * the whole document *	14-18		
Y	US 5 395 509 A (GUERRA CISNEROS CARLOS J ET AL) 7 March 1995 (1995-03-07) * the whole document *	14-18		
Y	EP 1 039 257 A (ZEXEL CORP) 27 September 2000 (2000-09-27) * the whole document *	14-18		
		--- -/--		
The present search report has been drawn up for all claims				
Place of search MUNICH		Date of completion of the search 29 April 2004	Examiner Ritter, C	
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>				

EPO FORM 1603 03.82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 1912

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 12, 25 December 1997 (1997-12-25) -& JP 09 203596 A (ZEXEL CORP), 5 August 1997 (1997-08-05) * abstract; figure 8 *	14-18	
Y	GB 1 572 777 A (ZEISS STIFTUNG) 6 August 1980 (1980-08-06) * the whole document *	24-27	
Y	DE 200 04 438 U (S K 6 ITALIANA S P A) 21 June 2000 (2000-06-21) * page 6, paragraph 2; figures 2A,2B *	14-23	
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 14, 5 March 2001 (2001-03-05) -& JP 2000 320931 A (NIPPON LIGHT METAL CO LTD), 24 November 2000 (2000-11-24) * abstract; figures 1,2,5,6 *	14-23	
A	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 07, 29 September 2000 (2000-09-29) & JP 2000 097524 A (NIPPON LIGHT METAL CO LTD), 4 April 2000 (2000-04-04) * abstract *	13-24	
A	US 5 329 971 A (CONDON DUANE R) 19 July 1994 (1994-07-19) * the whole document *	13-27	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 29 April 2004	Examiner Ritter, C
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application C : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1603 03.02 (P04001)



European Patent
Office

Application Number

EP 02 25 1912

CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:



European Patent
Office

**LACK OF UNITY OF INVENTION
SHEET B**

Application Number
EP 02 25 1912

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1-12

The inventive idea according to claims 1 to 12 seems to lie on the particular choice of the desiccant used in the condenser.

2. Claims: 1,13-27

the invention idea according to claims 1, 13 to 27 seems to lie on a plugging mechanism within the first header pipe.

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 1912

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-04-2004

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0992378	A	12-04-2000	IT	T0980838 A1	06-04-2000
			DE	69900185 D1	23-08-2001
			DE	69900185 T2	31-01-2002
			EP	0992378 A2	12-04-2000
			ES	2162715 T3	01-01-2002
DE 9219184	U	02-06-1999	DE	4238853 A1	19-05-1994
			DE	9219184 U1	02-06-1999
			DE	9219200 U1	09-12-1999
			DE	59306698 D1	10-07-1997
			WO	9411686 A1	26-05-1994
			EP	0668986 A1	30-08-1995
			ES	2103499 T3	16-09-1997
			US	5537839 A	23-07-1996
FR 2757612	A	26-06-1998	FR	2757612 A1	26-06-1998
			DE	19753641 A1	25-06-1998
JP 2000074528	A	14-03-2000	NONE		
EP 0886113	A	23-12-1998	KR	264815 B1	01-09-2000
			AU	721438 B2	06-07-2000
			AU	7184498 A	17-12-1998
			CA	2240756 A1	16-12-1998
			CN	1206098 A ,B	27-01-1999
			DE	69814235 D1	12-06-2003
			DE	69814235 T2	08-04-2004
			EP	0886113 A2	23-12-1998
			JP	3041603 B2	15-05-2000
			JP	11142023 A	28-05-1999
			TW	387989 B	21-04-2000
			US	5988267 A	23-11-1999
JP 10160287 8	A		NONE		
EP 1079186	A	28-02-2001	US	6170287 B1	09-01-2001
			EP	1079186 A1	28-02-2001
US 5992174	A	30-11-1999	DE	19712714 A1	01-10-1998
			EP	0867670 A2	30-09-1998
			JP	10272919 A	13-10-1998
JP 2000346500	A	15-12-2000	NONE		
DE 10039260	A	22-03-2001	DE	10039260 A1	22-03-2001
			ES	2178929 A1	01-01-2003

EPO FORM P449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 1912

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-04-2004

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 10039260 A		FR 2798456 A1	16-03-2001
		US 6349562 B1	26-02-2002
JP 09324962 0 A		NONE	
US 3006499 A	31-10-1961	NONE	
US 5395509 A	07-03-1995	US 5697602 A	16-12-1997
EP 1039257 A	27-09-2000	JP 11173788 A	02-07-1999
		DE 69821981 D1	01-04-2004
		EP 1039257 A1	27-09-2000
		US 6289979 B1	18-09-2001
		WO 9930100 A1	17-06-1999
JP 09203596 0 A		NONE	
GB 1572777 A	06-08-1980	DE 2709027 A1	07-09-1978
		FR 2382668 A1	29-09-1978
DE 20004438 U	21-06-2000	DE 20004438 U1	21-06-2000
		EP 1132695 A1	12-09-2001
		US 2001025511 A1	04-10-2001
JP 2000320931 A	24-11-2000	NONE	
JP 2000097524 A	04-04-2000	NONE	
US 5329971 A	19-07-1994	NONE	

EPO FORM P-0489

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82